




				Projection	DESCRIPTION SMD Power Inductor	
	2015-01-07					
				Shaanxi FKS Electronic Parts Import & Export Co., Ltd. FKS(X'ian) Electronic Technology Co.,Ltd.		
				Addess: B1 Building,Western Cloud Valley,Fengxi New Town, Xidian New Area,X'ian City, Shaanxi Province,China.		
				Tel: +86-29-8868 5333		
				Fax: +86-29-8868 0913		
				 		
	DATE				Order:- No. FKS784773047	SIZE A4
					Size: 4532	




F1 Typical Inductance vs. Current Characteristics:

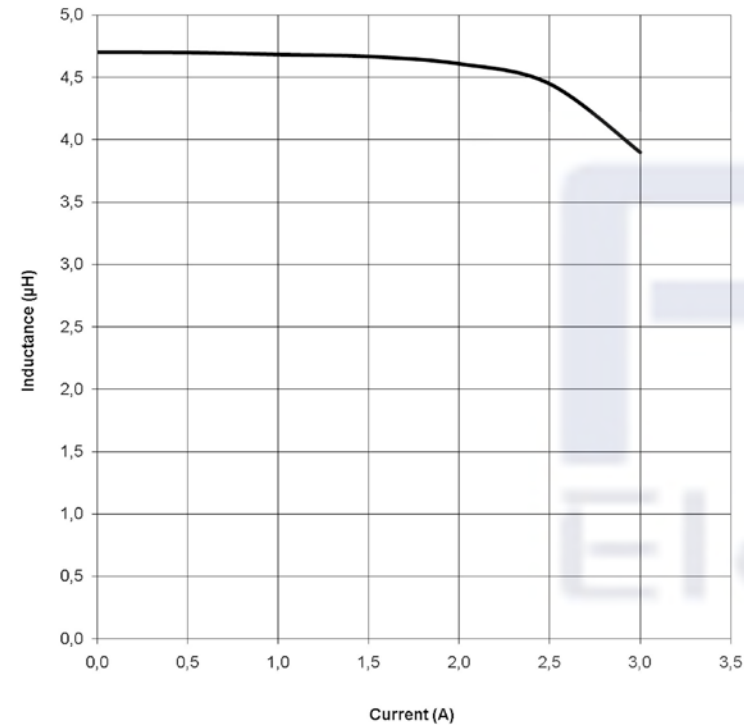


F2 Derating Curve:

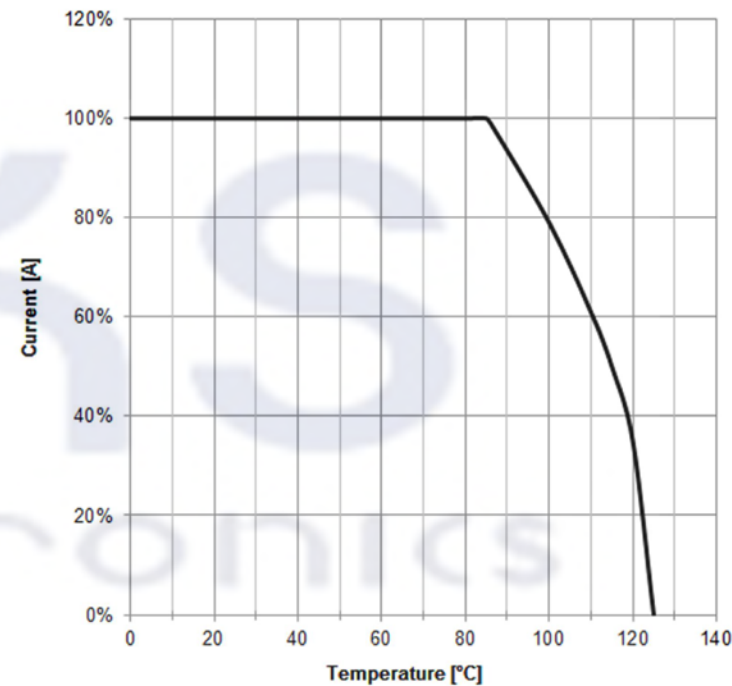



				Projection		DESCRIPTION		
	2015-01-07					----- SMD Power Inductor		
				Shaanxi FKS Electronic Parts Import&Export Co.,Ltd. FKS(Xi'an) Electronic Technology Co.,Ltd. Address: B1 Building,Western Cloud Valley,Fengxi New Town, Xixian New Area,Xi'an City, Shaanxi Province,China. Tel: +86-29-8868 5333 Fax: +86-29-8868 0913		Order.- No.	 COMPLIANT RoHS&REACH HALOGENFREE	SIZE
						FKS784773047		A4
	DATE					Size: 4532		




F3 Typical Impedance Characteristics:

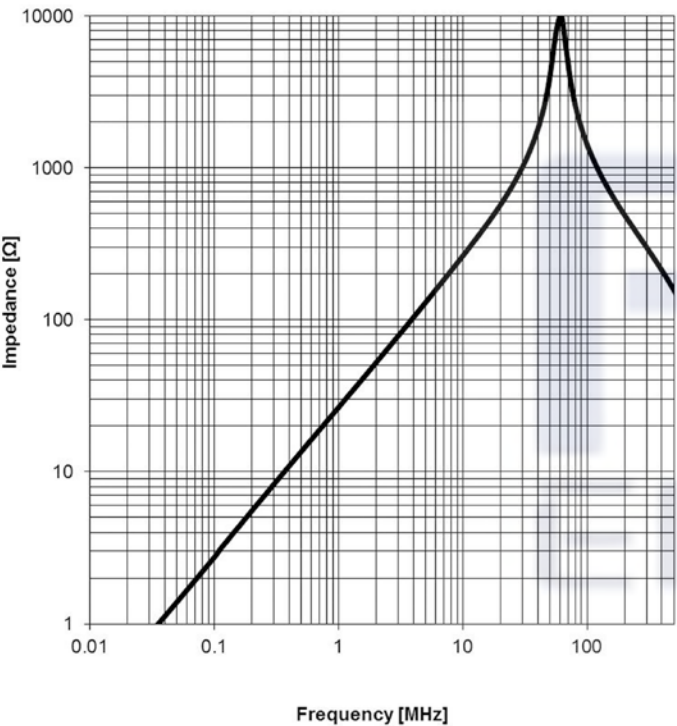


				Projection	DESCRIPTION			
	2015-01-07				SMD Power Inductor			
				Shaanxi FKS Electronic Parts Import&Export Co.,Ltd. FKS(Xi'an) Electronic Technology Co.,Ltd. Address: B1 Building,Western Cloud Valley,Fengxi New Town, Xixian New Area,Xi'an City, Shaanxi Province,China. Tel: +86-29-8868 5333 Fax: +86-29-8868 0913  	Order.- No.		 COMPLIANT RoHS&REACH HALOGENFREE	SIZE
					FKS784773047	A4		
						Size: 4532		
	DATE							

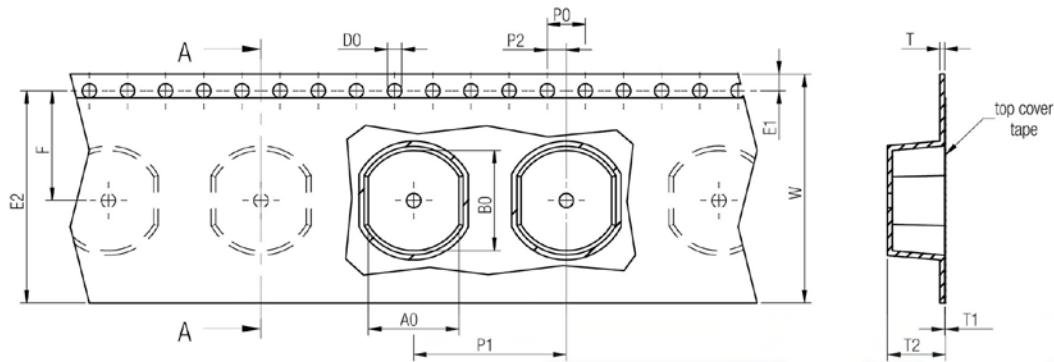



		A0	B0	W	P1	T	T1	T2	D0	E1	E2	F	P0	P2	VPE / packaging unit
tolerance		typ.	typ.	+0,3 -0,1	± 0,1	± 0,1	max.	typ.	+0,3 -0,1	± 0,1	min.	± 0,05	± 0,1	± 0,05	
size	4532	4,50	5,50	16,00	8,00	0,25	0,10	4,00	1,50	1,75	14,25	7,50	4,00	2,00	1500
	5848	5,50	6,50	16,00	8,00	0,25	0,10	5,50	1,50	1,75	14,25	7,50	4,00	2,00	1500
	7850	7,50	8,50	16,00	12,00	0,25	0,10	6,00	1,50	1,75	14,25	7,50	4,00	2,00	500
	1054	9,50	10,50	24,00	16,00	0,50	0,10	7,00	1,50	1,75	22,25	11,50	4,00	2,00	500

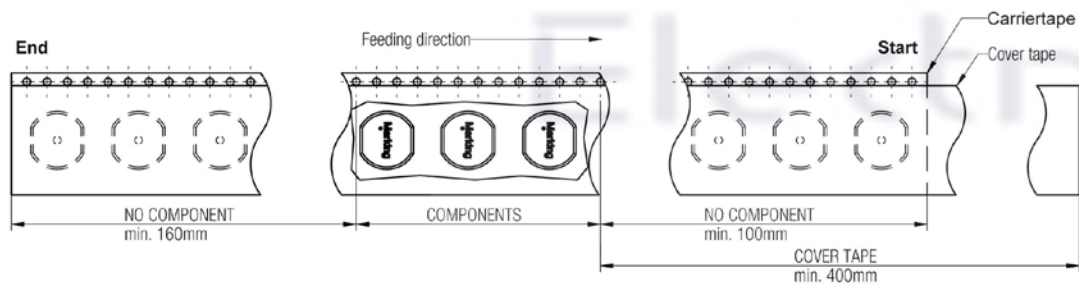

Packaging is referred to the international standard IEC 60286 - 3:2007

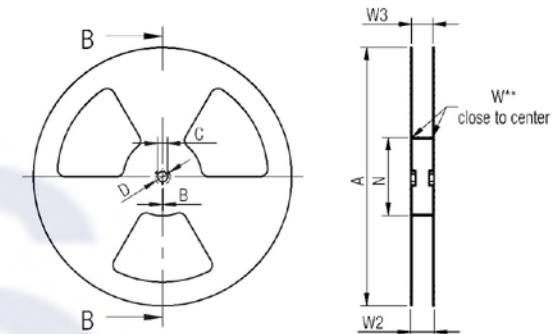


		A	B	C	D	N	W1	W2	W3	W3
tolerance			min.	± 0.8	min.	min.	+ 1,5	max.	min.	max.
Tape width	16 mm	330,00	1.50	13,00	20,20	100,00	16,40	22,40	15,90	19,40
	24 mm	330,00	1.50	13,00	20,20	100,00	24,40	30,40	23,90	27,40

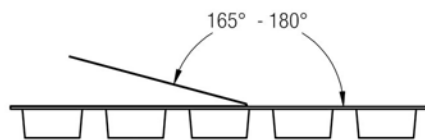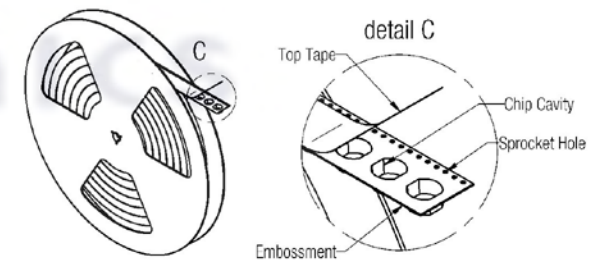

	Pull-of force
Tape width 16 mm	0,1 N - 1,3 N
24 mm	0,1 N - 1,3 N

Projection



Shaanxi FKS Electronic Parts Import&Export Co., Ltd.
FKS(Xi'an) Electronic Technology Co., Ltd.
Address: B1 Building, Western Cloud Valley, Fengxi New Town,
Xi'an New Area, Xi'an City, Shaanxi Province, China.
Tel: +86-29-8868 5333
Fax: +86-29-8868 0913



DESCRIPTION

SMD Power Inductor

Order.- No.

FKS784773047


Size: 4532



SIZE

A4

DATE

				Projection	DESCRIPTION SMD Power Inductor		
	2015-01-07						
	:			Shaanxi FKS Electronic Parts Import&Export Co.,Ltd. FKS(X'an) Electronic Technology Co.,Ltd. Address: B1 Building,Western Cloud Valley,Fengxi New Town, Xixian New Area,X'an City, Shaanxi Province,China. Tel: +86-29-8868 5333 Fax: +86-29-8868 0913		Order.- No.	 SIZE A4
				 		FKS784773047	
	DATE					Size: 4532	