


Classification Reflow Profile for SMT components:

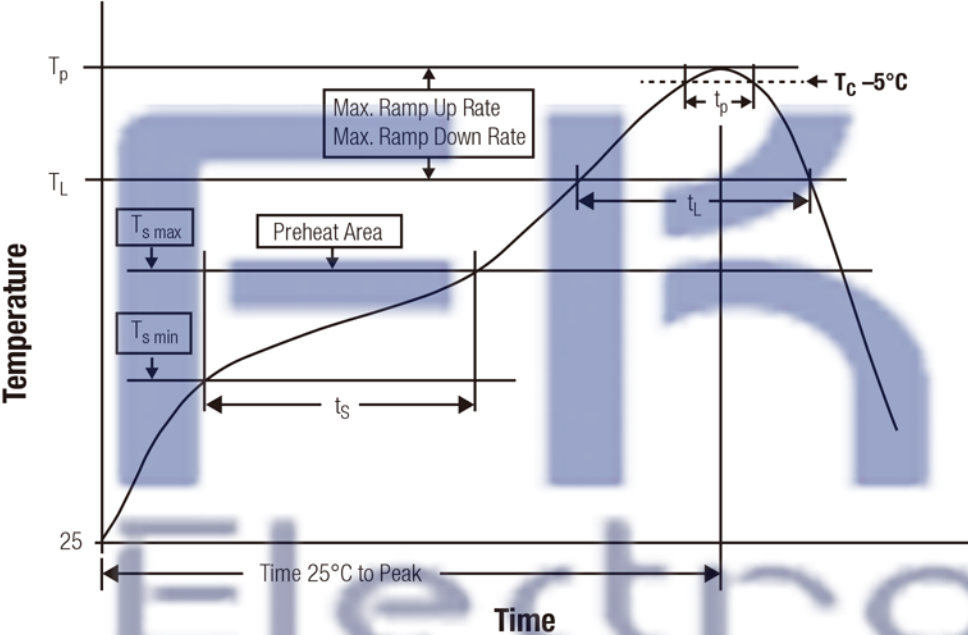

Classification Reflow Soldering Profile:

Profile Feature		Value
Preheat Temperature Min	$T_{s\ min}$	150 °C
Preheat Temperature Max	$T_{s\ max}$	200 °C
Preheat Time t_s from $T_{s\ min}$ to $T_{s\ max}$	t_s	60 - 120 seconds
Ramp-up Rate (T_L to T_p)		3 °C/ second max.
Liquidous Temperature	T_L	217 °C
Time t_L maintained above T_L	t_L	60 - 150 seconds
Peak package body temperature	T_p	see table below
Time within 5°C of actual peak temperaure	t_p	20 - 30 seconds
Ramp-down Rate (T_L to T_p)		6 °C/ second max.
Time 25°C to peak temperature		8 minutes max.


refer to IPC/ JEDEC J-STD-020E

Package Classification Reflow Temperature:

Properties	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
PB-Free Assembly I Package Thickness < 1.6 mm	260 °C	260 °C	260 °C
PB-Free Assembly I Package Thickness 1.6 mm - 2.5 mm	260 °C	250 °C	245 °C
PB-Free Assembly I Package Thickness ≥ 2.5 mm	250 °C	245 °C	245 °C


refer to IPC/ JEDEC J-STD-020E

RoHS COMPLIANT REACH COMPLIANT HALOGEN FREE AEC Q200 150 °C GRADE 6		DATE (YYYY-MM-DD) 2019-01-28	GENERAL TOLERANCE DIN ISO 2768-1m	PROJECTION METHOD 
FKS Electronics  Shaanxi FKS Electronic Parts Import&Export Co.,Ltd. Address:Building B1,The West Cloud Valley, Fengxi New City, Xixian New Area,Xianyang City,Shaanxi Province,China. Tel:0086 29 8868 5333 Fax:0086 29 8868 0913 Http://www.fks-tech.com		DESCRIPTION SMT High Current Inductor		ORDER CODE FKS7843330390
SIZE/TYPE 1011		STATUS Valid		

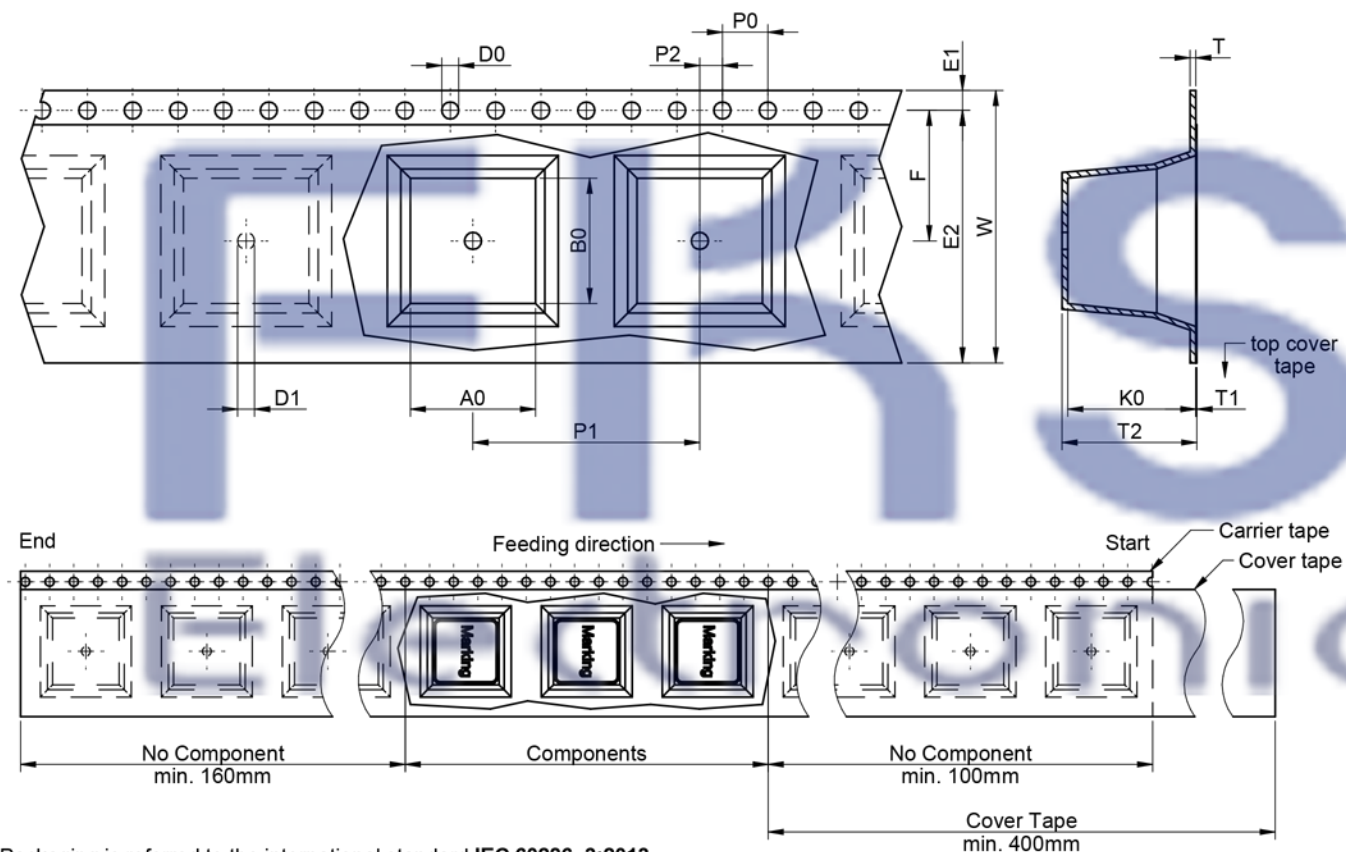
Packaging Specification - Tape and Reel: [mm]

Packaging is referred to the international standard IEC 60286 -3:2013

		A0	B0	W	T	T1	T2	K0	P0	P1	P2	D0		D1	E1	E2	F	Tape Type 2a	VPE / packaging unit
tolerance		typ.	typ.	+0,3	typ.	typ.	typ.	typ.	+0,1	+0,1	+0,1	+0,1	-0,0	typ.	+0,1	min.	+0,1		pcs.
size	1011	11.05	11.05	24	0.5	0.05	11.85	11.3	4	20	2	1.5		1.5	1.75	22.25	11.5	Polystyrene	200

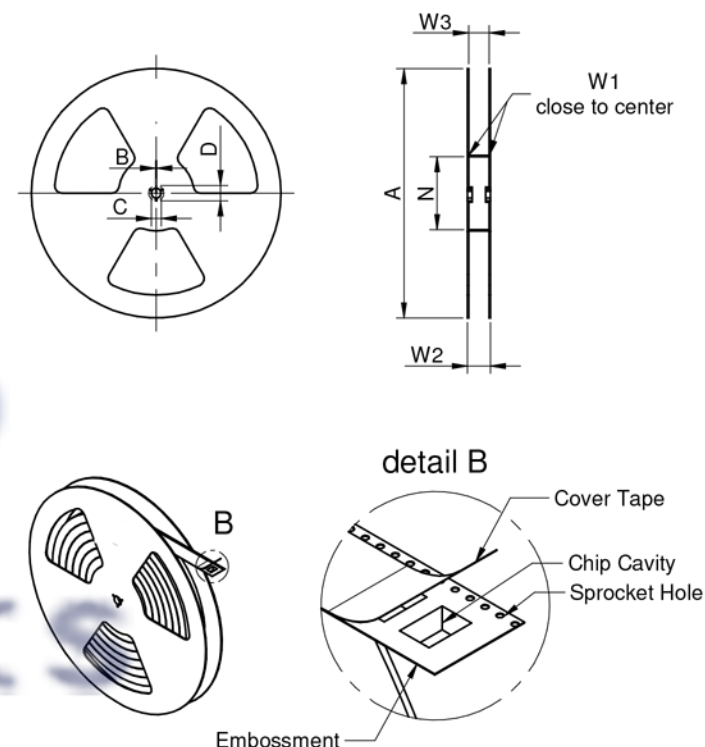

		A	B	C	D	N	W1	W2/W3
tolerance		±2,0	±0,5	±0,5	±0,5	±0,5	±0,4	±0,5
tape width	24mm	330	2	13	21	100	24.4	29.4




		Pull-of force
Tape width	24 mm	0,1 N - 1,3 N




FKS
Electronics



Shaanxi FKS Electronic Parts Import&Export Co.,Ltd.
Address:Building B1,The West Cloud Valley, Fengxi New City,
Xixian New Area,Xianyang City,Shaanxi Province,China.
Tel:0086 29 8868 5333 Fax:0086 29 8868 0913
<http://www.fks-tech.com>


	DATE (YYYY-MM-DD) 2019-01-28	GENERAL TOLERANCE DIN ISO 2768-1m	PROJECTION METHOD 
DESCRIPTION	SMT High Current Inductor		
			ORDER CODE FKS7843330390
SIZE/TYPE 1011		STATUS Valid	

Typical Impedance Characteristics:

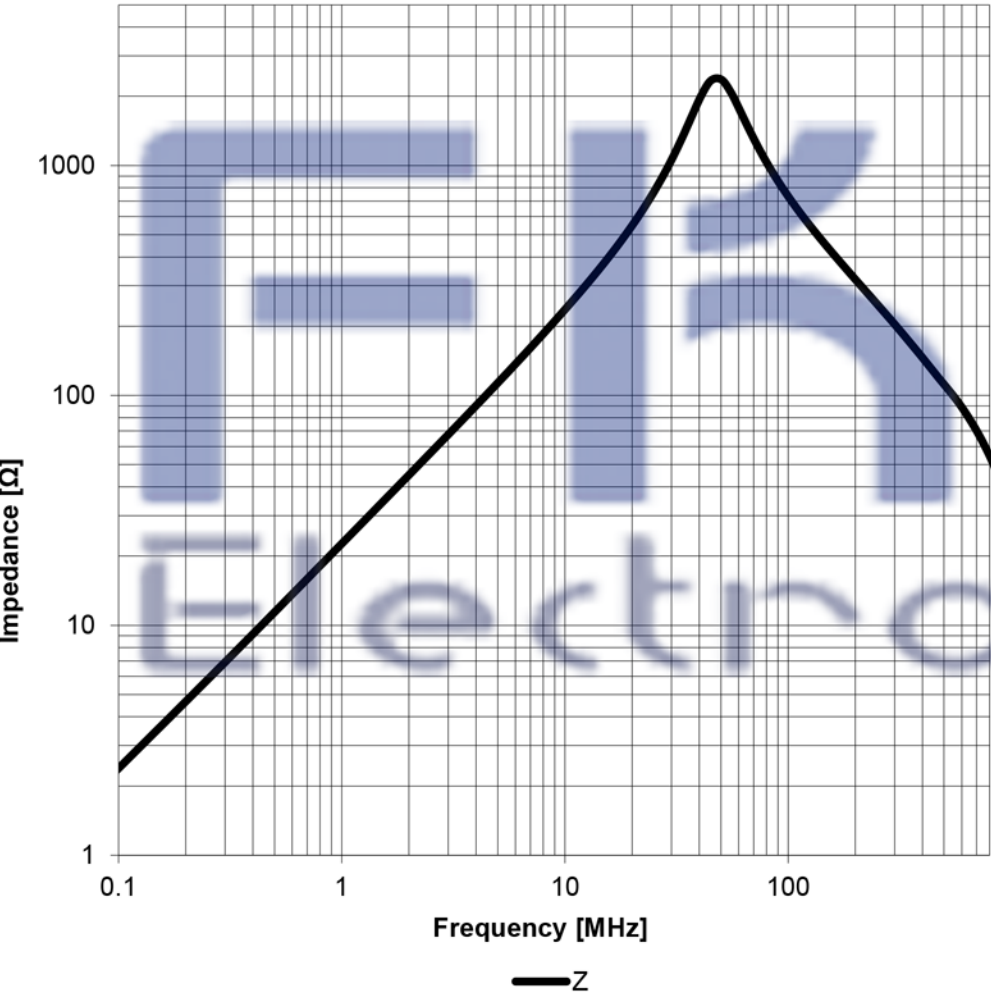


 RoHS COMPLIANT  REACH COMPLIANT  HALOGEN FREE  AEC Q200  Shaanxi FKS Electronic Parts Import&Export Co.,Ltd. Address:Building B1,The West Cloud Valley, Fengxi New City, Xixian New Area,Xianyang City,Shaanxi Province,China. Tel:0086 29 8868 5333 Fax:0086 29 8868 0913 Http://www.fks-tech.com		DATE (YYYY-MM-DD) 2019-01-28	GENERAL TOLERANCE DIN ISO 2768-1m	PROJECTION METHOD 
DESCRIPTION 1 SMT High Current Inductor		ORDER CODE FKS7843330390		
SIZE/TYPE 1011			STATUS Valid	

Typical Inductance vs. Current Characteristics:


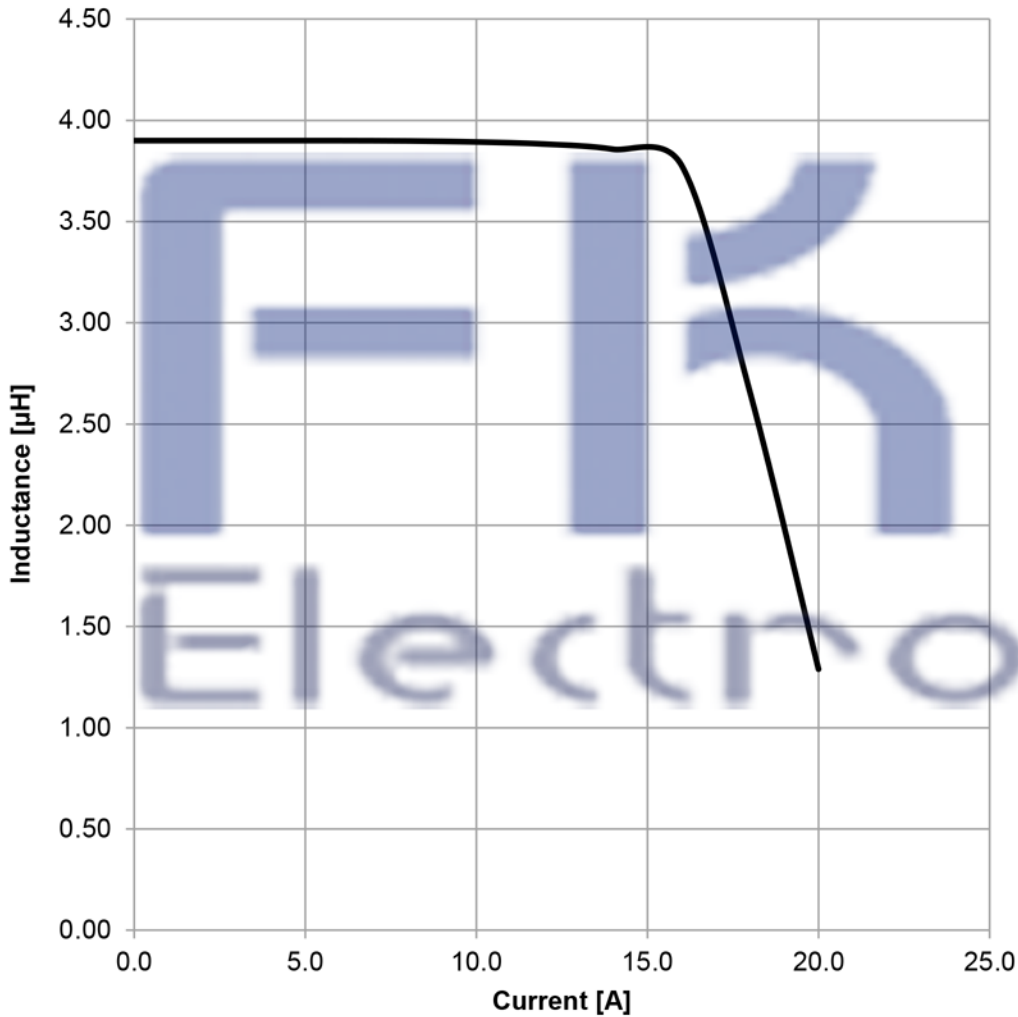


Typical Temperature Rise vs. Current Characteristics:

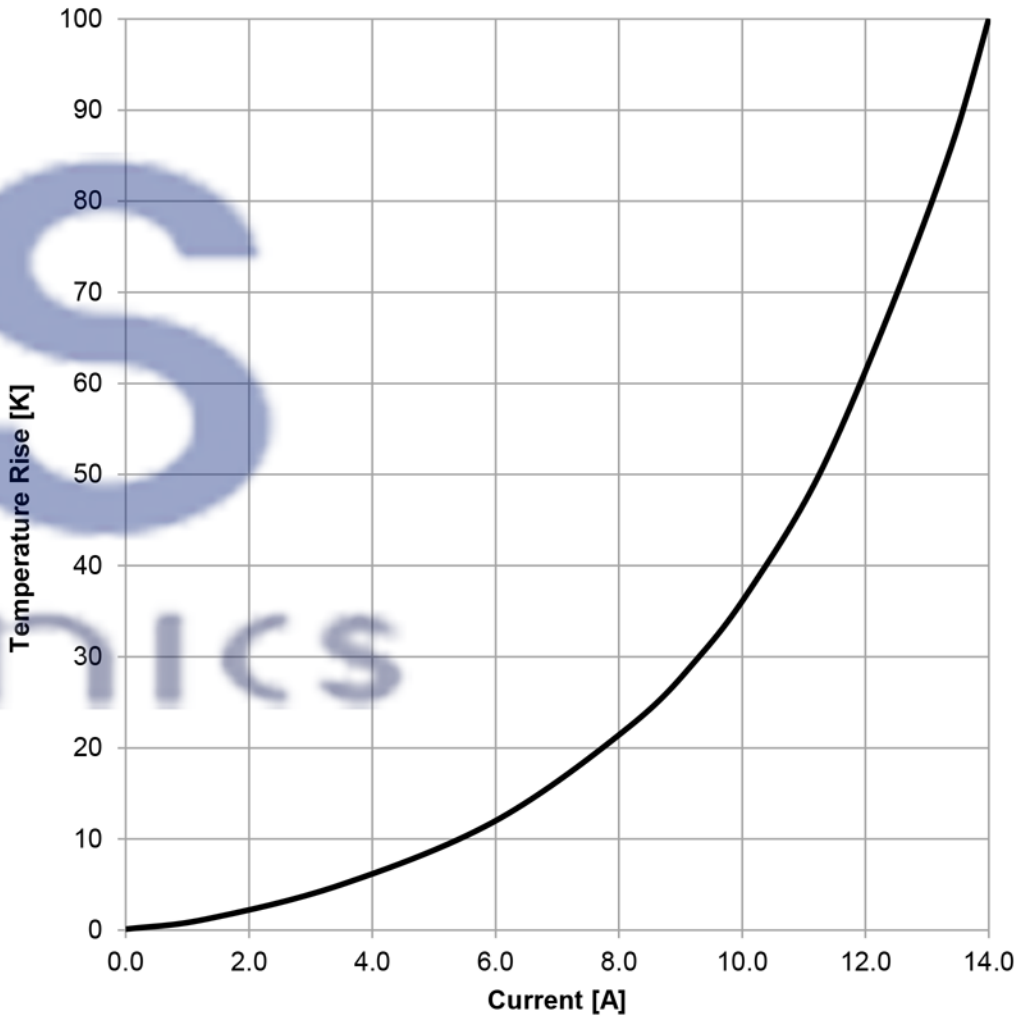

 				DATE (YYYY-MM-DD) 2019-01-28		GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD 	
Shaanxi FKS Electronic Parts Import&Export Co.,Ltd. Address:Building B1,The West Cloud Valley, Fengxi New City, Xixian New Area,Xianyang City,Shaanxi Province,China. Tel:0086 29 8868 5333 Fax:0086 29 8868 0913 Http://www.fks-tech.com				DESCRIPTION SMT High Current Inductor			ORDER CODE FKS7843330390		
							STATUS Valid		
SIZE/TYPE 1011									

Dimensions: [mm]




Scale - 2:1

Product Marking:

Marking	
---------	--

Recommended Land Pattern: [mm]



Solder Resist

no vias and traces in restricted area

Scale - 2:1

Schematic:



Electrical & Optical Properties:

Properties		Test conditions	Value	Unit	Tol.
Inductance	L	100 kHz/ 10 mA	3.9	μH	±20%
Rated Current	I _R	ΔT = 50 K	11.2	A	max.
Saturation Current	I _{SAT}	ΔL/L < 30 %	17.8	A	typ.
DC Resistance	R _{DC}	@ 20 °C	7.25	mΩ	typ.
DC Resistance	R _{DC}	@ 20 °C	8.7	mΩ	max.
Self Resonant Frequency	f _{res}		50	MHz	typ.

Certification:

RoHS Approval	Compliant [2011/65/EU&2015/863]
REACH Approval	Conform or declared [(EC)1907/2006]
Halogen Free	Conform [JEDEC JS709B]

General Information:

It is recommended that the temperature of the component does not exceed +150°C under worst case conditions

Ambient Temperature (referring to I _R)	-55 up to +100 °C
Operating Temperature	-55 up to +150 °C
Storage Conditions (in original packaging)	< 40 °C ; < 75 % RH
Moisture Sensitivity Level (MSL)	1

Test conditions of Electrical Properties: +20 °C, 33 % RH if not specified differently



FKS
Electronics



Shaanxi FKS Electronic Parts Import&Export Co.,Ltd.
Address: Building B1, The West Cloud Valley, Fengxi New City,
Xixian New Area, Xianyang City, Shaanxi Province, China.
Tel: 0086 29 8868 5333 Fax: 0086 29 8868 0913
[Http://www.fks-tech.com](http://www.fks-tech.com)

		DATE (YYYY-MM-DD) 2019-01-28	GENERAL TOLERANCE DIN ISO 2768-1m	PROJECTION METHOD
DESCRIPTION SMT High Current Inductor			ORDER CODE FKS7843330390	
SIZE/TYPE 1011			STATUS Valid	