



SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE	6F6G
LF1	Sn96%, Ag4%	Yes	Yes	

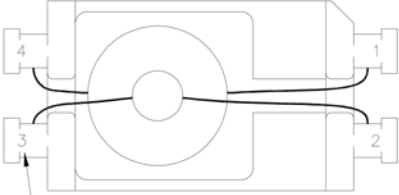

TERM. NO.'s FOR REF. ONLY

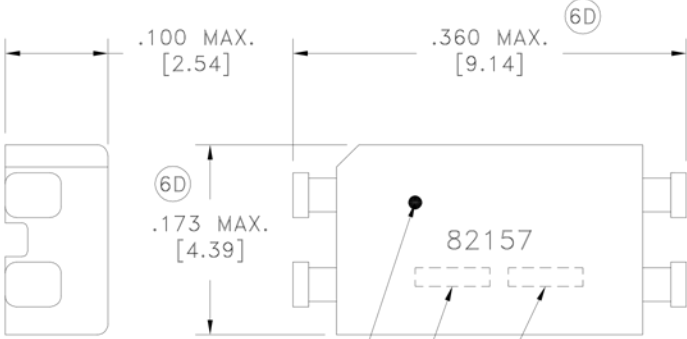


DOT LOCATES TERM. #1

LOT CODE & DATE CODE

SOLDER SUFFIX



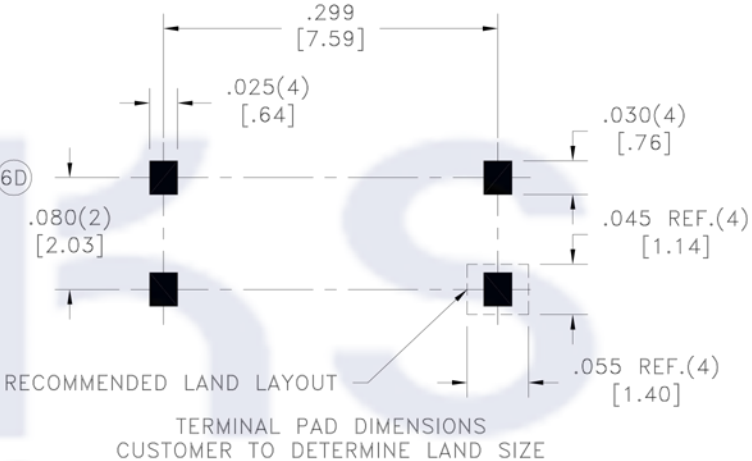

RECOMMENDED LAND LAYOUT

TERMINAL PAD DIMENSIONS
CUSTOMER TO DETERMINE LAND SIZE

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (@20°C): 1-2, 0.35 ohms max.
3-4, 0.35 ohms max.

DIELECTRIC RATING: 3000VAC, 1 minute tested by applying 3750VAC for 1 second between 1-4.

INDUCTANCE: 450uH min., 10kHz, 100mVAC, 1-2, Ls.

URNS RATIO: (4-3):(1-2) = 1:1, ±1%.

6C Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:
- Supplementary insulation for a primary circuit at a working voltage of 250Vrms.

6G Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

AGENCY NUMBER	
UL 60950-1	E205930
CSA 60950-1 (Via CUL)	E205930
IEC 60950-1 (Via CB cert.)	US/8440/UL
JAPAN (Via CB cert.)	US/8440/UL
ACA/AUSTEL (Via CB cert.)	US/8440/UL

Unless otherwise specified: Tolerances: Angles: ±1° Fractions: ±1/64 Decimals: ±.005[.13]	DRAWING TITLE	
	TRANSFORMER eiSos p/n: FKS750082157	
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	PART NO.	6G REV.
	FKS82157R-LF1	6H 10/17
SPECIFICATION SHEET 1 OF 1		

PART #
 82157R-LF1