

CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes





ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	0.350 ohms max.
D.C. RESISTANCE	3-4 @20°C	0.350 ohms max.
INDUCTANCE	1-2 10kHz, 100mVAC, Ls	30uH min.
DIELECTRIC	1-4 3750VAC, 1 second	3000VAC, 1 minute
URNS RATIO	(4-3):(1-2)	1.67:1, ±1%
SURGE TEST	6kV Peak	1.2 x 50uS

GENERAL SPECIFICATIONS:

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:
 - Supplementary insulation for a primary circuit at a working voltage of 250Vrms.

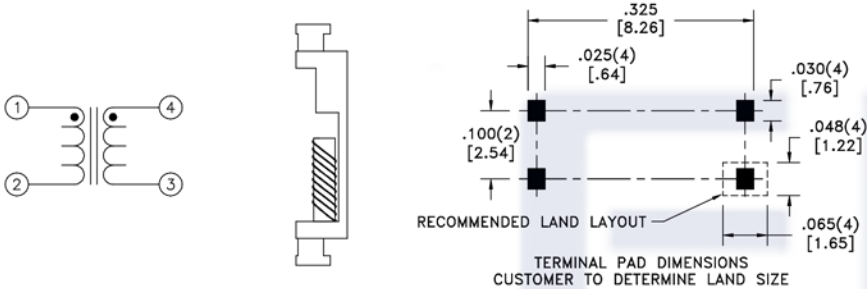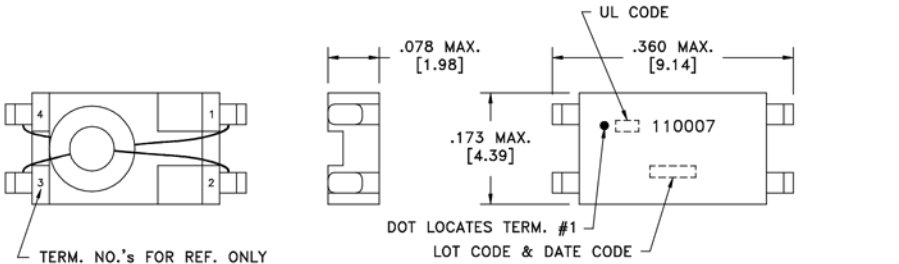

REV.	DATE
6B	10/09
6A	9/07

Packaging Specifications
 Method: Tape & Reel
 PKG-0748

6B

Tolerances unless otherwise specified:
 Angles: ±1° Decimals: ±.005 [.13]
 Fractions: ±1/64 Footprint: ±.005 [.13]
 This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: FKS750110007

PART NO.
 FKS750110007

AGENCY NUMBER	
UL CODE FILE# E205930	BB