







Dimensions: [mm]



Scale - 1:1

Recommended Hole Pattern: [mm]



Scale - 2:1

Schematic:



Electrical Properties:

Properties	Test conditions		Value	Unit	Tol.
Inductance	10 kHz/ 100 mV	L	2x18	mH	+50/-30
Rated Current	@ 70 °C	I _R	0.3	A	max.
DC Resistance	@ 20 °C	R _{DC}	2x3.1	Ω	max.
Rated Voltage	50 Hz	U _R	400	V (AC)	max.
Insulation Test Voltage	50 Hz/ 5 mA/ 2 sec.	U _T	3000	V (AC)	

General Properties:

It is recommended that the temperature of the component does not exceed +125°C under worst case conditions	
Storage Temperature (in original packaging)	-20 °C up to +60 °C
Operating Temperature	-40 °C up to +125 °C
Temperature Rise < 55K	
Test conditions of Electrical Properties: +20°C, 33% RH if not specified differently	


Shaanxi FKS Electronic Parts Import&Export Co.,Ltd.
FKS(Xi'an) Electronic Technology Co.,Ltd.
Adress: B1 Building,Western Cloud Valley,Fengxi New Town,
Xixian New Area,Xi'an City, Shaanxi Province,China.
Tel: +86-29-8868 5333
Fax: +86-29-8868 0913

FKS
Electronics




		GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD 			
DESCRIPTION Common Mode Power Line Choke (Horizontal)							
				ORDER CODE FKS744861180			
SIZE UT		REVISION 003.000		STATUS Valid		E €	

Typical Insertion Loss Characteristics:

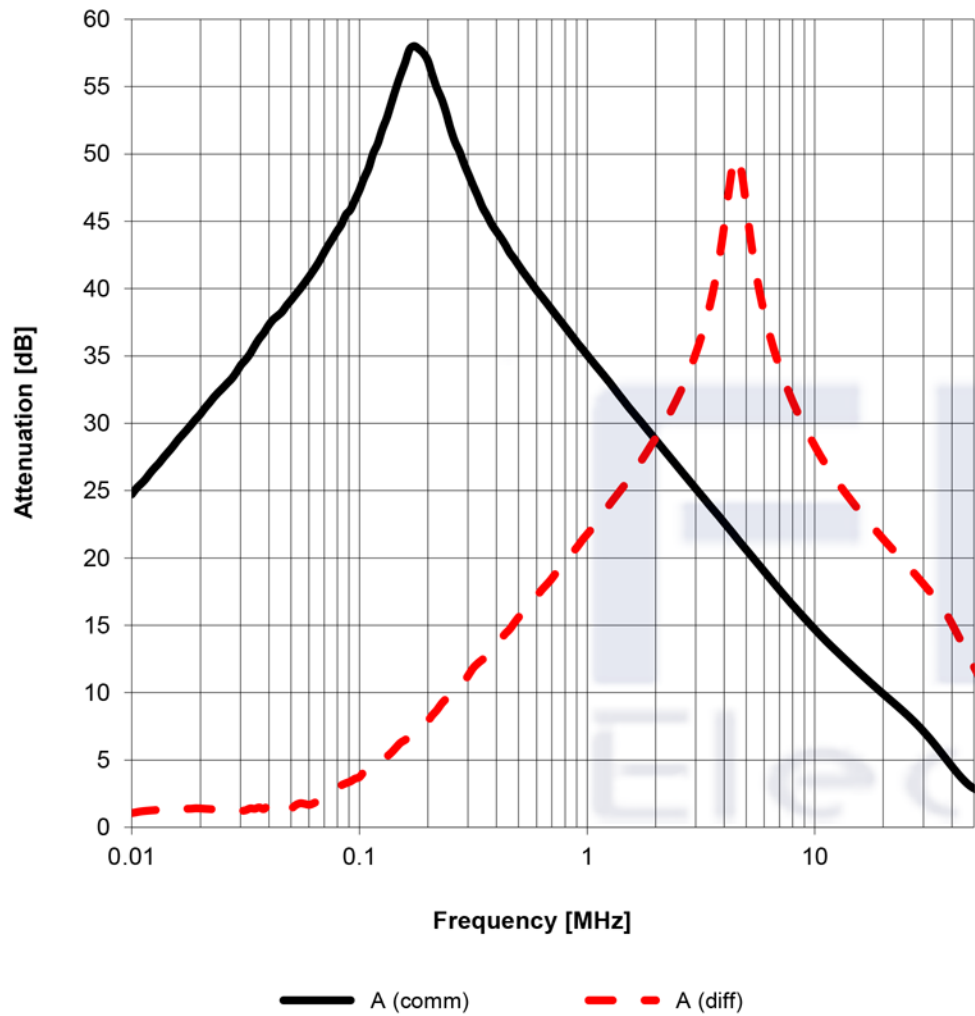


Test Setup:

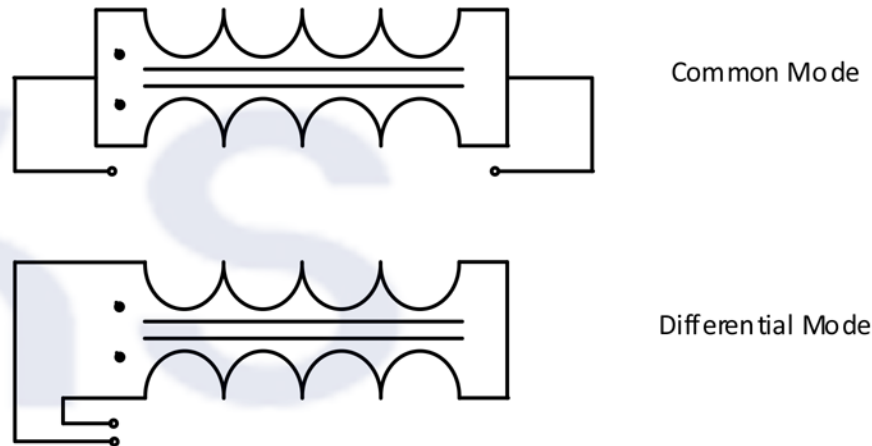


Shaanxi FKS Electronic Parts Import&Export Co.,Ltd. FKS(Xi'an) Electronic Technology Co.,Ltd. Address: B1 Building,Western Cloud Valley,Fengxi New Town, Xixian New Area,Xi'an City, Shaanxi Province,China. Tel: +86-29-8868 5333 Fax: +86-29-8868 0913		GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD	
DESCRIPTION		Common Mode Power Line Choke (Horizontal)		ORDER CODE	
SIZE		REVISION		STATUS	
UT		003.000		Valid	
FKS Electronics		FKSS744861180			

Packaging Specification - Tray: [mm]

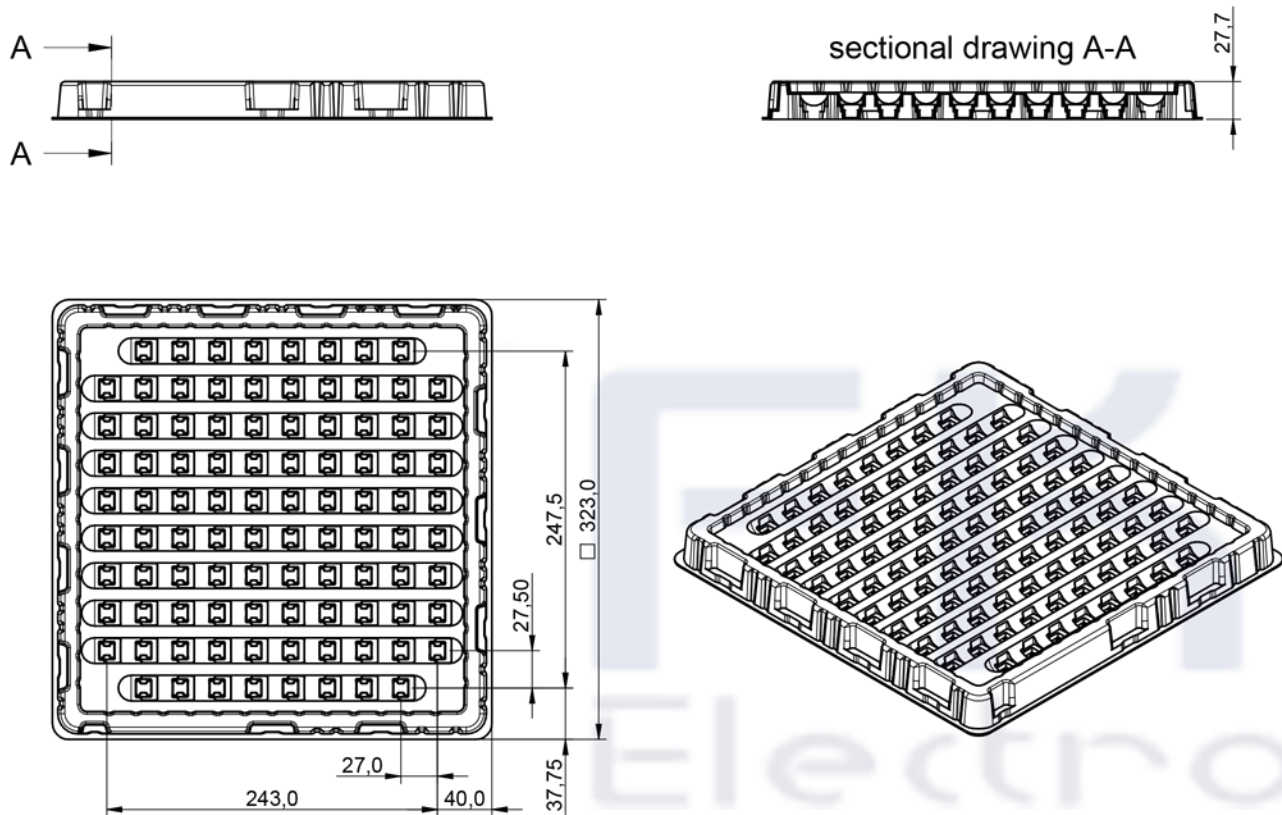

		A	B	C	D	E	F	G	H	I	J	Tube	VPE / packaging unit
tolerance		±2,0	ref.	ref.	ref.	ref.	ref.	ref.	ref.	ref.	ref.		pcs.
size	744861xxx	505,00	16,00	22,00	11,50	4,50	4,00	6,90	7,50	13,50	0,80	PVC	96

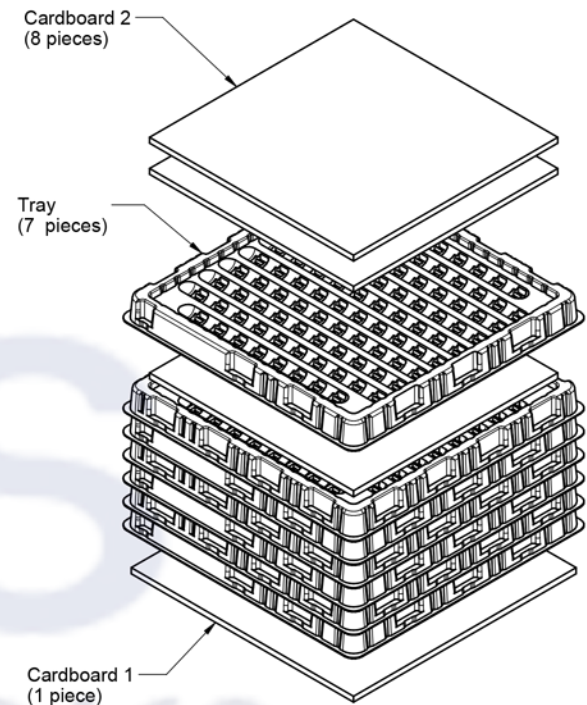


Shaanxi FKS Electronic Parts Import&Export Co.,Ltd. FKS(Xi'an) Electronic Technology Co.,Ltd. Adress: B1 Building,Western Cloud Valley,Fengxi New Town, Xixian New Area,Xi'an City, Shaanxi Province,China. Tel: +86-29-8868 5333 Fax: +86-29-8868 0913		GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD 	
		DESCRIPTION Common Mode Power Line Choke (Horizontal)		ORDER CODE FKS744861180	
SIZE UT	REVISION 003.000	STATUS Valid			

FKS
Electronics



Classification Wave Soldering Profile:

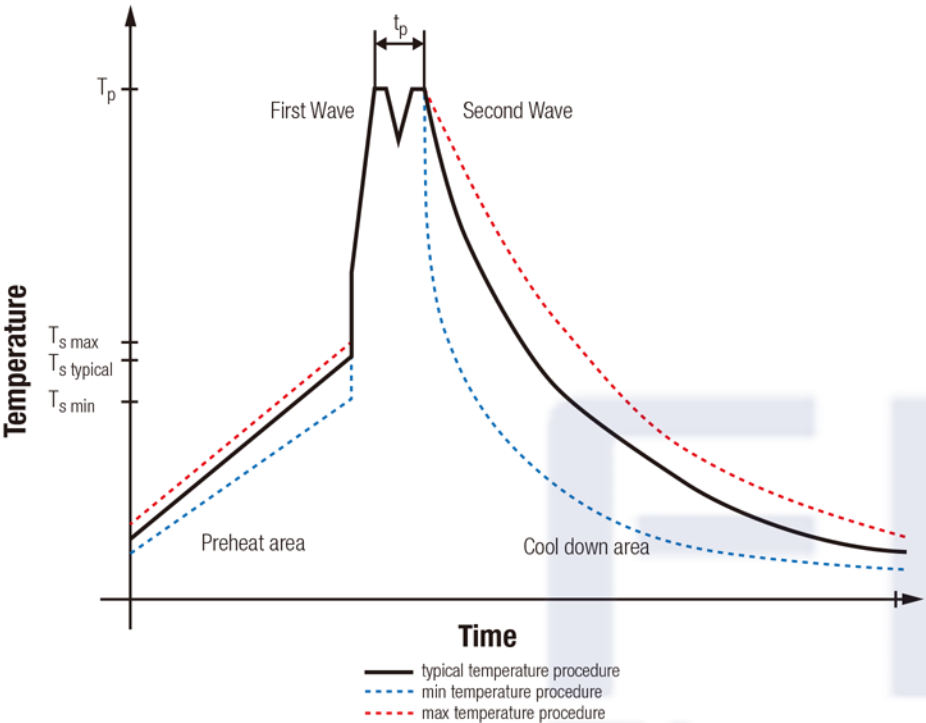

Classification Wave Soldering Profile:

Profile Feature		Pb-Free Assembly	Sn-Pb Assembly
Preheat Temperature Min	$T_{s \min}$	100 °C	100 °C
Preheat Temperature Typical	$T_{s \text{ typical}}$	120 °C	120 °C
Preheat Temperature Max	$T_{s \max}$	130 °C	130 °C
Preheat Time t_s from $T_{s \min}$ to $T_{s \max}$	t_s	70 seconds	70 seconds
Ramp-up Rate	ΔT	150 °C max.	150 °C max.
Peak temperature	T_p	250 °C - 260 °C	235 °C - 260 °C
Time of actual peak temperature	t_p	max. 10 seconds max. 5 seconds each wave	max. 10 seconds max. 5 seconds each wave
Ramp-down Rate, Min		~ 2 K/ second	~ 2 K/ second
Ramp-down Rate, Typical		~ 3.5 K/ second	~ 3.5 K/ second
Ramp-down Rate, Max		~ 5 K/ second	~ 5 K/ second
Time 25°C to 25°C		4 minutes	4 minutes

refer to EN61760-1:2006

Shaanxi FKS Electronic Parts Import&Export Co.,Ltd.

FKS(Xi'an) Electronic Technology Co.,Ltd.

Adress: B1 Building,Western Cloud Valley,Fengxi New Town,
Xixian New Area,Xi'an City, Shaanxi Province,China.

Tel: +86-29-8868 5333

Fax: +86-29-8868 0913

FKS

Electronics

GENERAL TOLERANCE
DIN ISO 2768-1m

PROJECTION METHOD

DESCRIPTION
**Common Mode Power
Line Choke (Horizontal)**

ORDER CODE
FKS744861180

SIZE
UT

REVISION
003.000

STATUS
Valid