


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes



* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

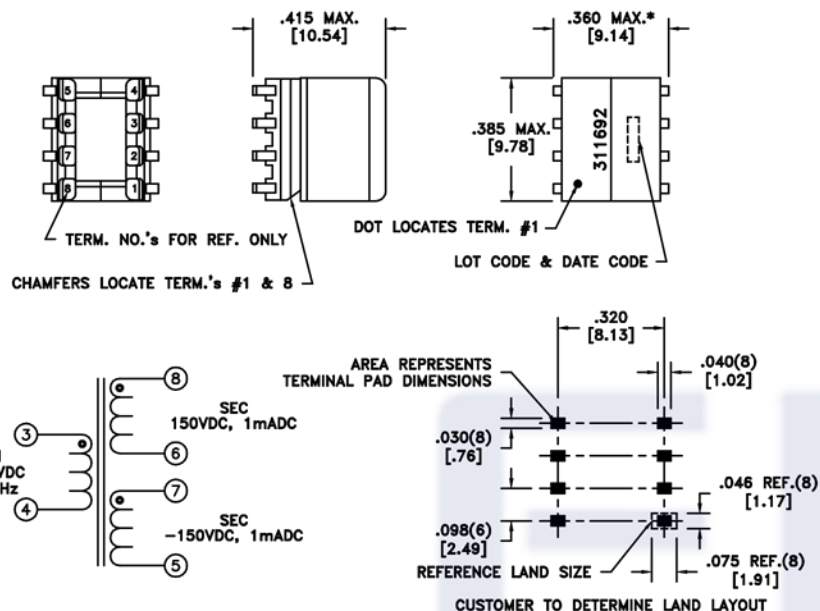

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	3-4	@20°C
D.C. RESISTANCE	8-6	@20°C
D.C. RESISTANCE	7-5	@20°C
INDUCTANCE	3-4	100kHz, 100mVAC, Ls
SATURATION CURRENT	20% rolloff from initial	1.0A
LEAKAGE INDUCTANCE	3-4	tie(5+6+7+8), 100kHz, 100mVAC, Ls
DIELECTRIC	3-8	tie(6+7), 1500VAC, 1 second
DIELECTRIC	8-7	600VDC, 1 second
URNS RATIO	(8-6):(3-4)	5:1, ±1%
URNS RATIO	(7-5):(3-4)	5:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel PKG-0410		Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [13] Footprint: ±.005 [13]	TRANSFORMER	FKS750311692
6A	11/10			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750311692	SPECIFICATION SHEET 1 OF 1