


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn100%	Yes	Yes

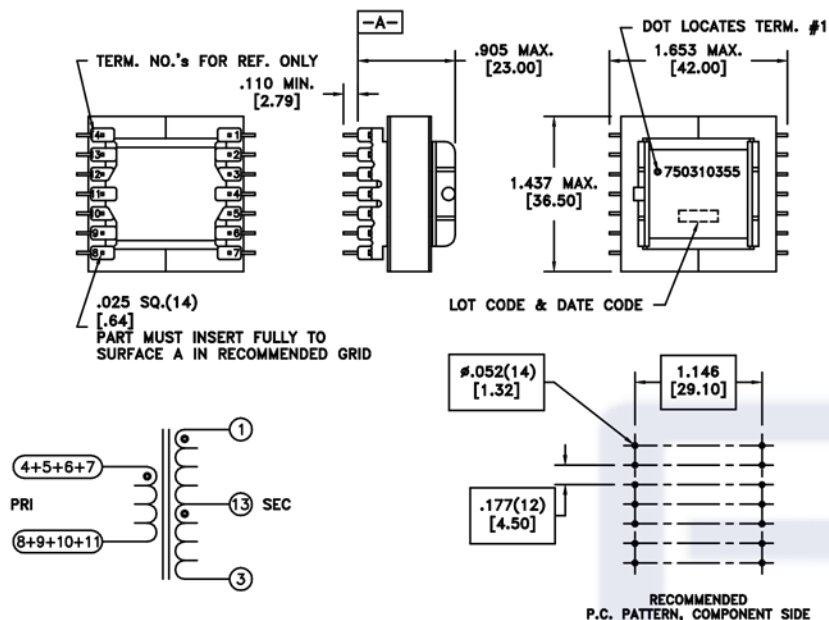

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	7-8 tie(4+5+6+7, 8+9+10+11), @20°C	0.005 ohms max.
D.C. RESISTANCE	1-3 @20°C	0.250 ohms max., 0.120 typ.
INDUCTANCE	7-8 tie(4+5+6+7, 8+9+10+11), 50kHz, 10mVAC, Ls	2.5uH ±10%
SATURATION CURRENT @85°C	20% rolloff from initial	>50ADC
CONTINUOUS CURRENT	40°C temp rise from ambient	24A
LEAKAGE INDUCTANCE	7-8 tie(1+3, 4+5+6+7, 8+9+10+11), 100kHz, 1.0VAC, Ls	100nH max.
DIELECTRIC	PRI-SEC 1250VAC, 1 second	1000VAC, 1 minute
URNS RATIO	(13-3):(1-13)	1:1, ±1%
URNS RATIO	(1-3):(4-11)	10:1, ±1%
URNS RATIO	(1-3):(5-10)	10:1, ±1%
URNS RATIO	(1-3):(6-9)	10:1, ±1%
URNS RATIO	(1-3):(7-8)	10:1, ±1%

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [1.3] Footprint: ±.001 [0.3]	DRAWING TITLE	PART NO.
6B	8/11	Method: Tray PKG-0838		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	TRANSFORMER	FKS750310355
6A	2/09				eiSos p/n: FKS750310355	SPECIFICATION SHEET 1 OF 1