




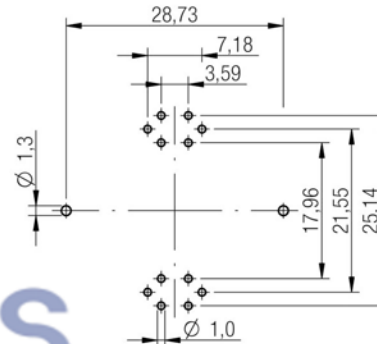



A Dimensions: [mm]

Scale - 1:1

Reference on drawing	Description
Marking	FKS760801130 (Article Number)
Date code	YYWW
Revision	00

B Recommended hole pattern: [mm]

Scale - 1:1

C Schematic:**D Electrical Properties:**

Properties	Test conditions		Value	Unit	Tol.
Inductance	100 kHz/ 100 mV	L	750	μH	±10%
Rated current	ΔT = 40 K	I _R	0.9	A	max.
Saturation current	IΔL/LI < 20%	I _{sat}	3.9	A	typ.
DC Resistance 1		R _{DC1}	720	mΩ	max.
DC Resistance 2		R _{DC2}	320	mΩ	max.
Input voltage		U _i	85-265	V (AC)	
Turns ratio		n	90:8		±3%
Output power 1		P _o	75	W	
Insulation test voltage		U _T	1500	V (AC)	

E General information:

It is recommended that the temperature of the part does not exceed 125°C under worst case operating conditions.

- Ambient temperature: -40°C to +85°C (referring to I_R)
- Operating temperature: -40°C to +125°C
- Storage temperature (in tray packaging): -20°C to +40°C; 75% RH max.
- Test conditions of Electrical Properties: 20°C, 33% RH if not specified differently

Shaanxi FKS Electronic Parts Import&Export Co.,Ltd.

FKS(Xi'an) Electronic Technology Co.,Ltd.


Address: B1 Building,Western Cloud Valley,Fengxi New Town,
Xixian New Area,Xi'an City, Shaanxi Province,China.

Tel: +86-29-8868 5333

Fax: +86-29-8868 0913

FKS
Electronics

Projection



Shaanxi FKS Electronic Parts Import&Export Co.,Ltd.

FKS(Xi'an) Electronic Technology Co.,Ltd.

Address: B1 Building,Western Cloud Valley,Fengxi New Town,

Xixian New Area,Xi'an City, Shaanxi Province,China.

Tel: +86-29-8868 5333

Fax: +86-29-8868 0913

FKS
Electronics

DESCRIPTION

PFC Choke

Order.- No.

FKS760801130



SIZE


A4

Size: RM10

Shaanxi FKS Electronic Parts Import&Export Co.,Ltd.
FKS(Xi'an) Electronic Technology Co.,Ltd.
Address: B1 Building,Western Cloud Valley,Fengxi New Town,
Xixian New Area,Xi'an City, Shaanxi Province,China.
Tel: +86-29-8868 5333
Fax: +86-29-8868 0913



F1 Typical Inductance vs. Current Characteristics:

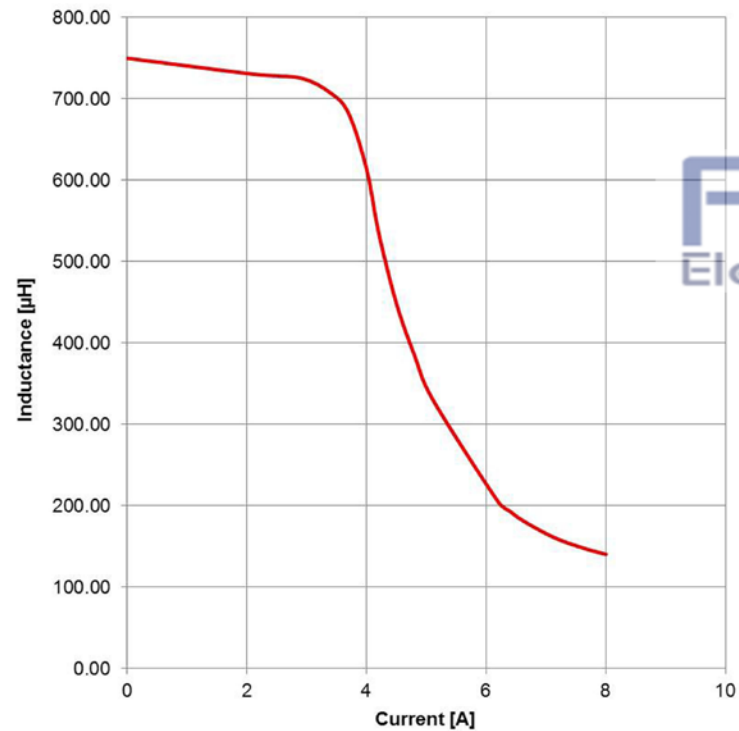


				Projection		DESCRIPTION	
	2014-09-16						
						PFC Choke	
				Shaanxi FKS Electronic Parts Import&Export Co.,Ltd. FKS(Xi'an) Electronic Technology Co.,Ltd. Address: B1 Building,Western Cloud Valley,Fengxi New Town, Xixian New Area,Xi'an City, Shaanxi Province,China. Tel: +86-29-8868 5333 Fax: +86-29-8868 0913		Order.- No.	SIZE
						FKS760801130	
	DATE					Size: RM10	

H Soldering Specifications:

Shaanxi FKS Electronic Parts Import&Export Co.,Ltd.
FKS(Xi'an) Electronic Technology Co.,Ltd.
Address: B1 Building,Western Cloud Valley,Fengxi New Town,
Xixian New Area,Xi'an City, Shaanxi Province,China.
Tel: +86-29-8868 5333
Fax: +86-29-8868 0913




H4: Classification Wave Soldering Profile:

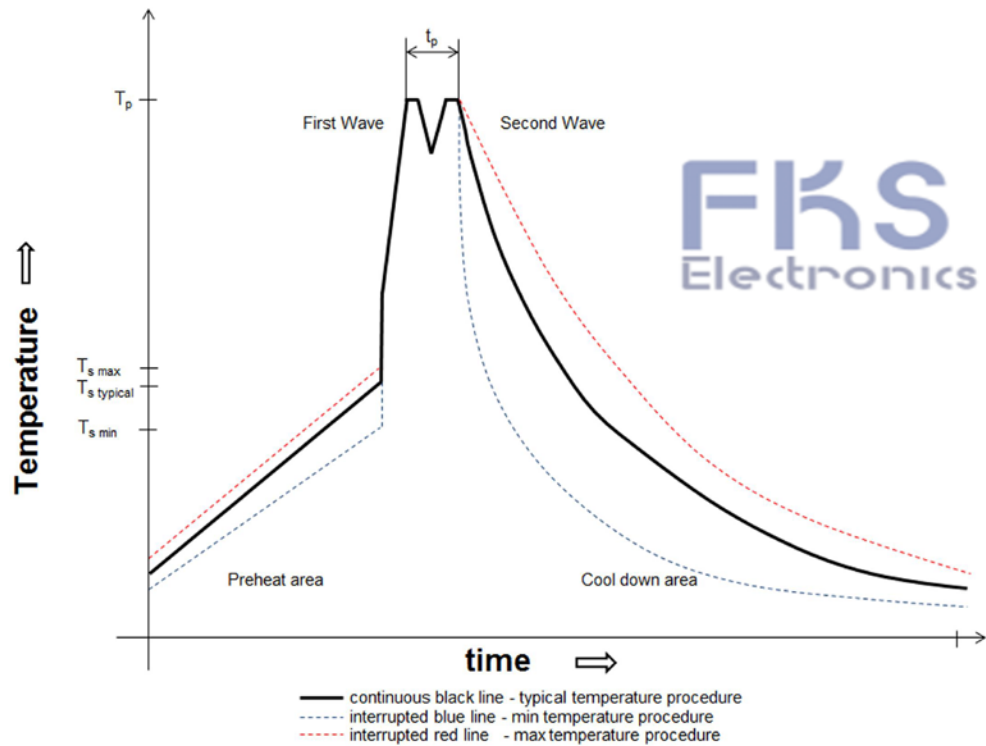

H5: Classification Wave Profile

Profile Feature	Pb-Free Assembly	Sn-Pb Assembly
Preheat - Temperature Min (T_{smin}) - Temperature Typical ($T_{stypical}$) - Temperature Max (T_{smax}) - Time (t_s) from (T_{smin} to T_{smax})	100°C 120°C 130°C 70 seconds	100°C 120°C 130°C 70 seconds
Δ preheat to max Temperature	150°C max.	150°C max.
Peak temperature (T_p)	250°C - 260°C	235°C - 260°C
Time of actual peak temperature (t_p)	max. 10 seconds max. 5 second each wave	max. 10 seconds max. 5 second each wave
Ramp-down rate - Min - Typical - Max	~ 2 K/s ~ 3.5 K/s ~ 5 K/s	~ 2 K/s ~ 3.5 K/s ~ 5 K/s
Time 25°C to 25°C	4 minutes	4 minutes

refer to EN 61760-1:2006

				Projection 		DESCRIPTION		
1.6	2014-09-16	SSt	MiBr					
1.5	2014-03-31	SSt	SSt	Shaanxi FKS Electronic Parts Import&Export Co.,Ltd. FKS(Xi'an) Electronic Technology Co.,Ltd. Address: B1 Building,Western Cloud Valley,Fengxi New Town, Xixian New Area,Xi'an City, Shaanxi Province,China. Tel: +86-29-8868 5333 Fax: +86-29-8868 0913 		PFC Choke		
1.4	2013-04-29	SSt	SSt					
1.3	2012-12-10	SSt	SSt					
1.2	2012-10-29	SSt	MiBr					
1.1	2012-06-28	SSt	SSt			Order.- No.		
1.0	2012-05-01	SSt	MiBr	FKS760801130				
REV	DATE	BY	CHECKED			Size: RM10		