





CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY
DOT LOCATES TERM. #1


TERM. NO.'s FOR REF. ONLY



LOT CODE & DATE CODE

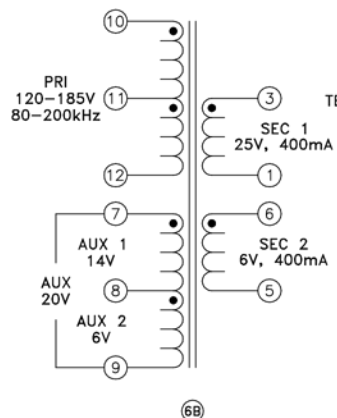

AREA REPRESENTS
TERMINAL PAD DIMENSIONS

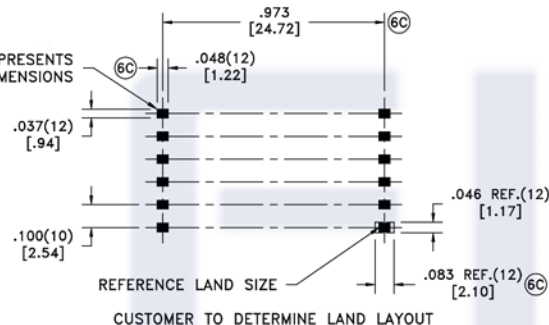

REFERENCE LAND SIZE
CUSTOMER TO DETERMINE LAND LAYOUT

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	10-12 @20°C	2.70 ohms ±10%
D.C. RESISTANCE	7-8 @20°C	0.705 ohms ±10%
D.C. RESISTANCE	8-9 @20°C	0.338 ohms ±10%
D.C. RESISTANCE	3-1 @20°C	0.117 ohms ±10%
D.C. RESISTANCE	6-5 @20°C	0.038 ohms ±20%
INDUCTANCE	10-12 10kHz, 100mVAC, Ls	1.25mH ±10%
SATURATION CURRENT	20% rolloff from initial	800mA
LEAKAGE INDUCTANCE	10-12 tie(1+3+5+6, 7+8+9), 100kHz, 100mVAC, Ls	14uH typ., 25uH max.
DIELECTRIC	1-12 tie(3+5, 9+10), 3750VAC, 1 second	3000VAC, 1 minute
DIELECTRIC	7-12 625VAC, 1 second	500VAC, 1 minute
URNS RATIO	(10-11):(11-12)	1:1, ±1%
URNS RATIO	(10-12):(7-8)	9.846:1, ±1%
URNS RATIO	(10-12):(8-9)	21.33:1, ±1%
URNS RATIO	(10-12):(3-1)	5.565:1, ±1%
URNS RATIO	(10-12):(6-5)	21.33:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:

- Reinforced insulation for a primary circuit at a working voltage of 400VDC.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel PKG-0799	Angles: ±1° Fractions: ±1/64	TRANSFORMER	FKS750813540
6C	12/11		Decimals: ±.005 [.13] Footprint: ±.005 [.13]		
6B	7/11				
6A	4/11				



This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

eiSos p/n: FKS750813540



SPECIFICATION SHEET 1 OF 1