



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

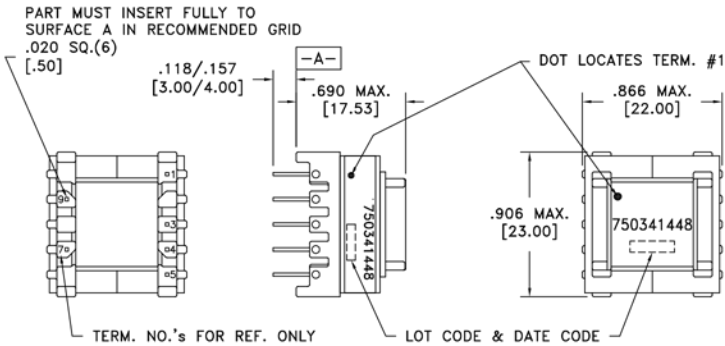


ALTERNATE MARKING DETAIL

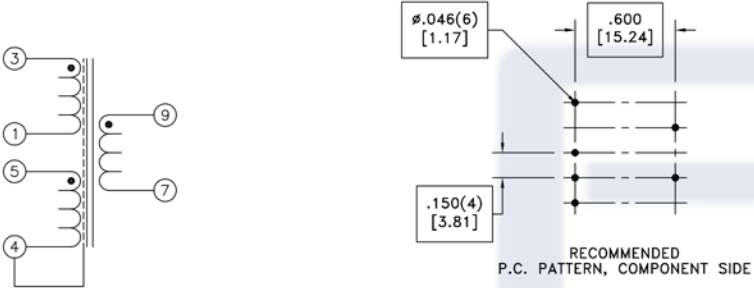

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	3-1 @20°C	0.34 ohms max.
D.C. RESISTANCE	5-4 @20°C	0.34 ohms max.
D.C. RESISTANCE	9-7 @20°C	0.020 ohms max.
INDUCTANCE	3-1 10kHz, 100mVAC, Ls	450.0uH ±10%
DIELECTRIC	1-9 tie(3+4), 3000VAC, 1 second	-
URNS RATIO	(3-1):(5-4)	3:1, ±2%
URNS RATIO	(3-1):(9-7)	7:1, ±2%

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	 CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.001 [.03]	DRAWING TITLE	PART NO.
		Method: Tray PKG-0736		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	TRANSFORMER	FKS750341448
6A	11/13				eiSos p/n: FKS750341448	SPECIFICATION SHEET 1 OF 1

