

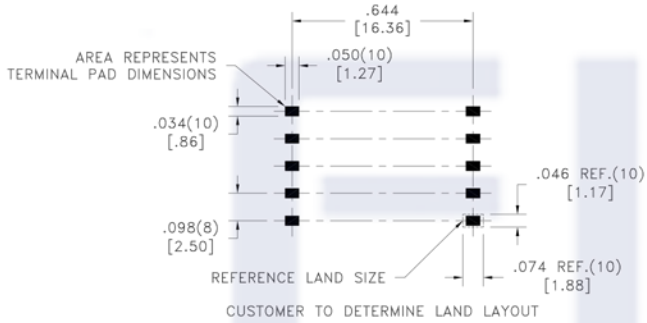


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

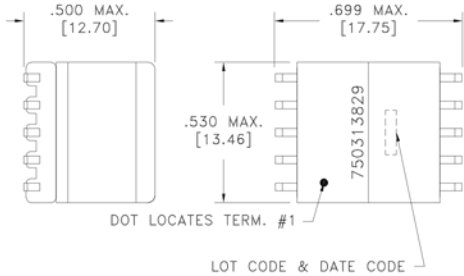

TERM. NO.'s FOR REF. ONLY



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	1.75 ohms ±10%
D.C. RESISTANCE	7-9 @20°C	0.070 ohms max.
INDUCTANCE	1-3 10kHz, 100mVAC, Ls	1.59mH ±10%
SATURATION CURRENT	1-3 20% rolloff from initial	600mA
LEAKAGE INDUCTANCE	1-3 tie(7+9), 100kHz, 100mVAC, Ls	20uH typ., 40uH max.
DIELECTRIC	3-9 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(3-1):(9-7)	6.25:1, ±1%

GENERAL SPECIFICATIONS:
Safety Standard Undefined.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0499	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. FKS750313829
6A	10/15			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750313829	SPECIFICATION SHEET 1 OF 1

