


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes




TERM. NO.'s FOR REF. ONLY

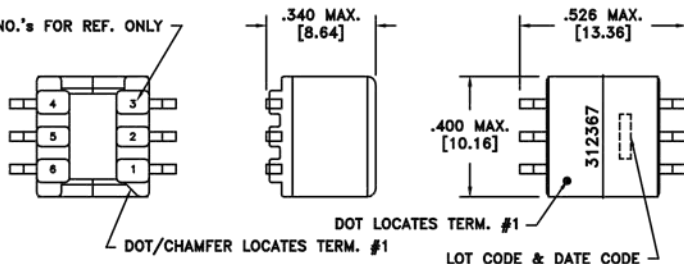


DOT LOCATES TERM. #1

LOT CODE & DATE CODE

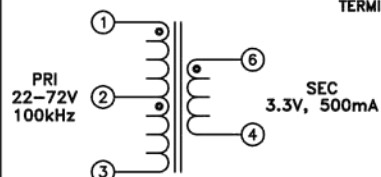

AREA REPRESENTS
TERMINAL PAD DIMENSIONS

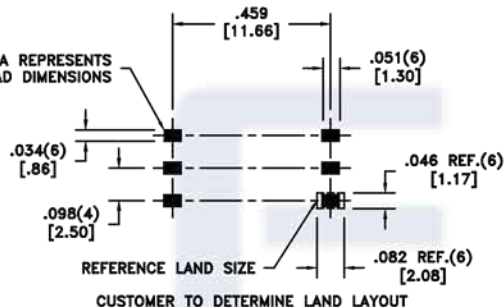

REFERENCE LAND SIZE

CUSTOMER TO DETERMINE LAND LAYOUT

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	0.800 ohms ±10%
D.C. RESISTANCE	6-4 @20°C	0.030 ohms max.
INDUCTANCE	1-3 10kHz, 100mVAC, Ls	300uH ±10%
SATURATION CURRENT	20% rolloff from initial	450mA
LEAKAGE INDUCTANCE	1-3 tie(4+6), 100kHz, 100mVAC, Ls	1.7uH typ., 4uH max.
DIELECTRIC	1-6 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(1-2):(2-3)	1:1, ±1%
URNS RATIO	(1-3):(6-4)	8.4:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Safety Standard Undefined.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel PKG-0519		Angles: ±1° Fractions: ±1/64	TRANSFORMER	FKS750312367
6B	1/13			Decimals: ±.005 [.13] Footprint: ±.005 [.13]		
6A	12/12			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750312367	SPECIFICATION SHEET 1 OF 1

