

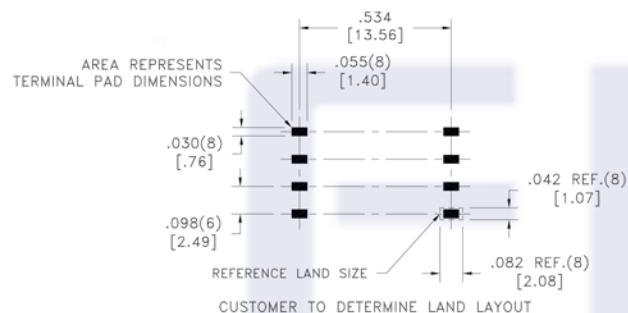


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

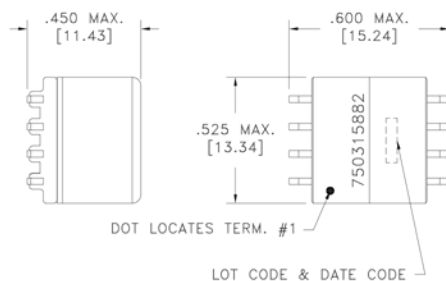

TERM. NO.'s FOR REF. ONLY



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 @20°C	0.065 ohms ±10%
D.C. RESISTANCE	5-8 @20°C	0.070 ohms ±10%
INDUCTANCE	1-4 10kHz, 100mVAC, Ls	22.7uH ±10%
SATURATION CURRENT	1-4 20% rolloff from initial	3.75A
LEAKAGE INDUCTANCE	1-4 tie(5+8), 100kHz, 100mVAC, Ls	0.70uH typ., 1.50uH max.
DIELECTRIC	1-8 1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(1-4):(5-8)	1.26:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Functional insulation only.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel PKG-0328		Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	TRANSFORMER	FKS750315882
6A	2/16			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750315882	SPECIFICATION SHEET 1 OF 1

