

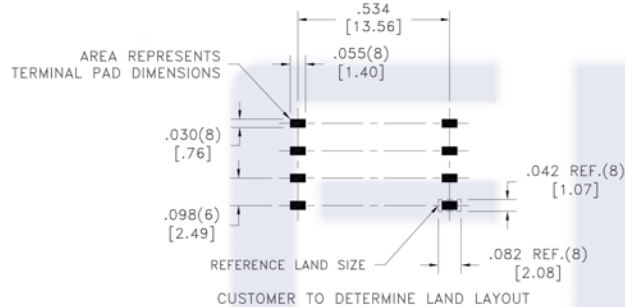


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

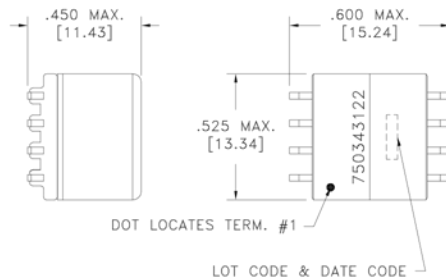

TERM. NO.'s FOR REF. ONLY



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 @20°C	0.075 ohms max.
D.C. RESISTANCE	8-5 @20°C	0.020 ohms max.
INDUCTANCE	1-4 50kHz, 100mVAC, Ls	27.0uH ±10%
SATURATION CURRENT	1-4 20% rolloff from initial	1.8A
LEAKAGE INDUCTANCE	1-4 tie(5+8), 100kHz, 100mVAC, Ls	0.5uH max.
DIELECTRIC	1-5 1875VAC, 1 second	-
URNS RATIO	(1-4):(8-5)	3:1, ±2%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0328	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. FKS750343122
6A	1/17			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750343122	SPECIFICATION SHEET 1 OF 1

