



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes


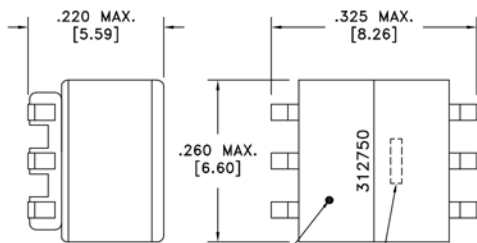


TERM. NO.'s FOR REF. ONLY



DOT LOCATES TERM. #1

LOT CODE & DATE CODE

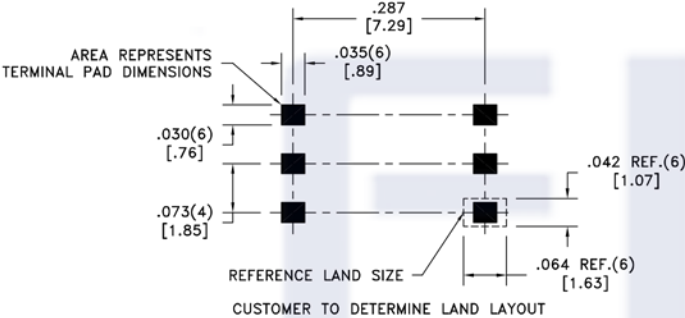

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	3-1 @20°C	0.203 ohms ±10%
D.C. RESISTANCE	4-6 @20°C	0.212 ohms ±10%
INDUCTANCE	3-1 100kHz, 100mVAC, Ls	23.0uH ±10%
INDUCTANCE	4-6 100kHz, 100mVAC, Ls	23.0uH ±10%
SATURATION CURRENT	20% rolloff from initial	760mA
LEAKAGE INDUCTANCE	tie(4+6), 100kHz, 100mVAC, Ls	200nH typ., 400nH max.
DIELECTRIC	1-6 1500VAC, 1 second	-
URNS RATIO	(3-1):(4-6)	1:1, ±1%

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +85°C including temp rise.

Safety Standard Undefined.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0637		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. FKS750312750
6A	4/13			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750312750	SPECIFICATION SHEET 1 OF 1