


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes



* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

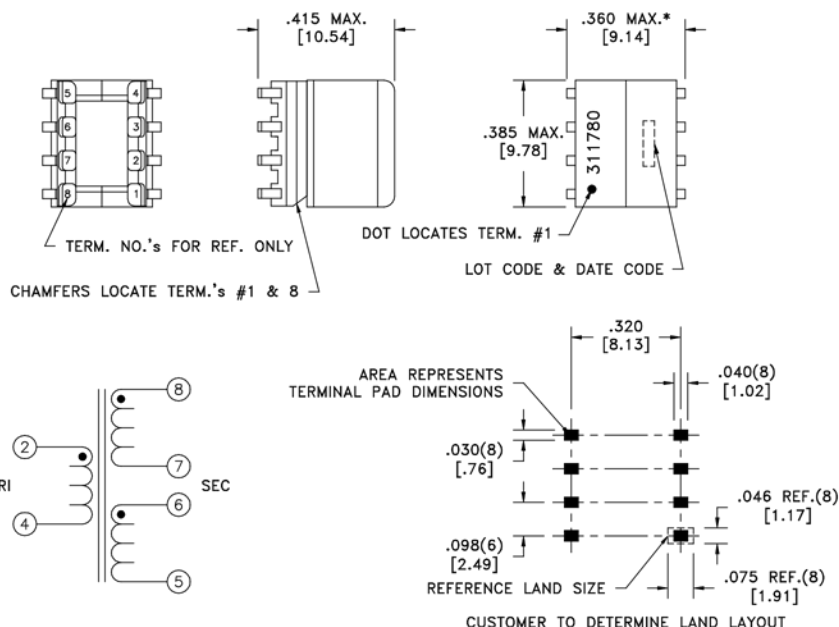

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	
D.C. RESISTANCE	2-4	@20°C
D.C. RESISTANCE	5-6	@20°C
D.C. RESISTANCE	7-8	@20°C
INDUCTANCE	2-4	100kHz, 100mVAC, Ls
SATURATION CURRENT		20% rolloff from initial
LEAKAGE INDUCTANCE	2-4	tie(5+6+7+8), 100kHz, 10mVAC, Ls
DIELECTRIC	2-8	2500VAC, 1 second
DIELECTRIC	2-6	2500VAC, 1 second
URNS RATIO		(8-7):(2-4)
URNS RATIO		(6-5):(2-4)

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel PKG-0410	Angles: $\pm 1^\circ$ Fractions: $\pm 1/64$ Decimals: $\pm .005$ [.13] Footprint: $\pm .005$ [.13]	TRANSFORMER	FKS750311780
6A	2/11		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750311780	SPECIFICATION SHEET 1 OF 1

