


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

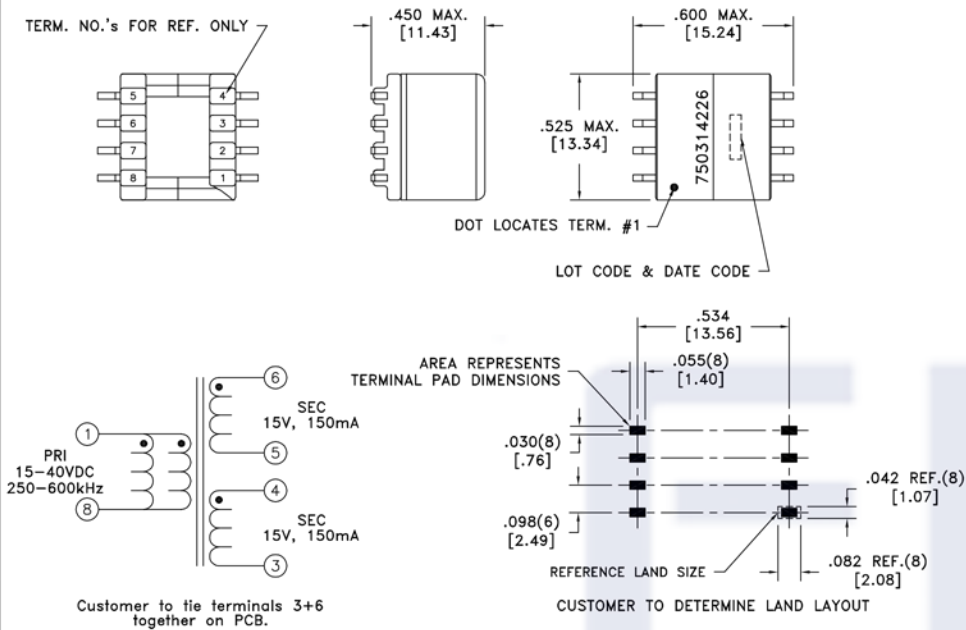

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-8 @20°C	0.067 ohms ±10%
D.C. RESISTANCE	6-5 @20°C	0.350 ohms ±10%
D.C. RESISTANCE	4-3 @20°C	0.350 ohms ±10%
INDUCTANCE	1-8 10kHz, 100mVAC, Ls	33.8uH ±10%
SATURATION CURRENT	20% rolloff from initial	1.0A
LEAKAGE INDUCTANCE	1-8 tie(3+4, 5+6), 100kHz, 10mVAC, Ls	150nH max.
DIELECTRIC	1-5 tie(4+6), 1875VAC, 1 second	-
URNS RATIO	(6-5):(1-8)	2:1, ±1%
URNS RATIO	(6-5):(4-3)	1:1, ±1%

GENERAL SPECIFICATIONS:  
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Safety Standard Undefined.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0328	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	DRAWING TITLE <b>TRANSFORMER</b>	PART NO. FKS750314226
6A	11/13			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n:FKS750314226	SPECIFICATION SHEET 1 OF 1

