
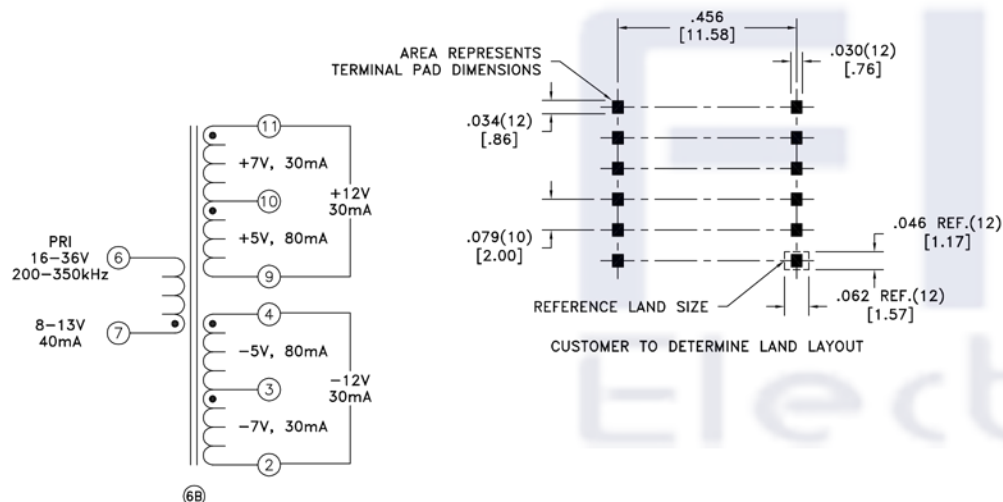


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

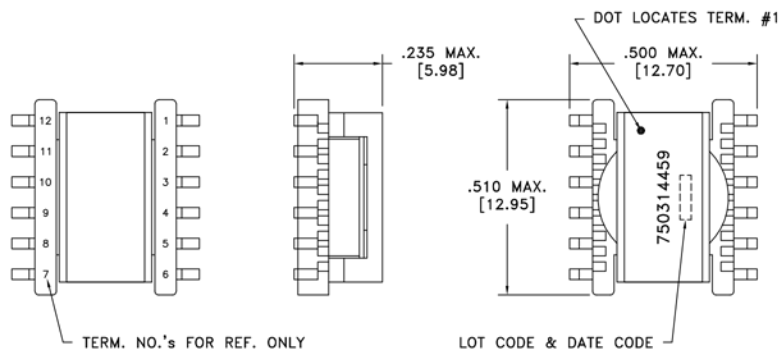

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	11-10	@20°C
D.C. RESISTANCE	3-2	@20°C
D.C. RESISTANCE	7-6	@20°C
D.C. RESISTANCE	10-9	@20°C
D.C. RESISTANCE	4-3	@20°C
INDUCTANCE	7-6	10kHz, 100mVAC, Ls
SATURATION CURRENT		20% rolloff from initial
LEAKAGE INDUCTANCE	7-6	tie(2+3+4+9+10+11), 100kHz, 100mVAC, Ls
DIELECTRIC	7-9	tie(2+11), 1875VAC, 1 second
URNS RATIO		(7-6):(11-10)
URNS RATIO		(7-6):(3-2)
URNS RATIO		(7-6):(10-9)
URNS RATIO		(7-6):(4-3)
URNS RATIO		(3-2):(4-3)

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Designed to comply with the following requirements as defined by IEC60950-1, EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950.1:

- Functional insulation.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0757	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: $\pm 1^\circ$ Fractions: $\pm 1/64$ Decimals: $\pm .005$ [.13] Footprint: $\pm .005$ [.13]	DRAWING TITLE TRANSFORMER	PART NO. FKS750314459
6B	2/15			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750314459	
6A	9/14					

