


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Au100%	Yes	Yes


6C

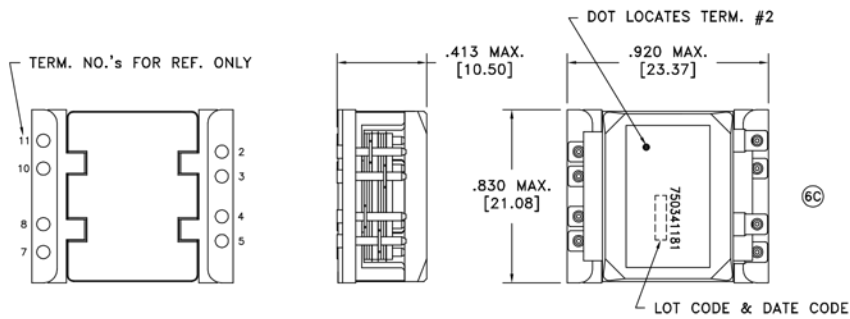

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	3.5 mOhms max.
D.C. RESISTANCE	3-5 @20°C	3.5 mOhms max.
D.C. RESISTANCE	7-10 @20°C	1.2 mOhms max.
D.C. RESISTANCE	8-11 @20°C	1.2 mOhms max.
INDUCTANCE	2-5 tie(3+4), 10kHz, 1.0VAC, Ls	86.0uH min.
LEAKAGE INDUCTANCE	2-5 tie(3+4, 7+8+10+11), 100kHz, 100mVAC, Ls	0.500uH max.
DIELECTRIC	2-7 tie(3+4, 8+10), 2250VDC, 1 second	-
URNS RATIO	(2-4):(3-5)	1:1, ±1%
URNS RATIO	(2-4):(7-10)	3:1, ±1%
URNS RATIO	(2-4):(8-11)	3:1, ±1%

6C

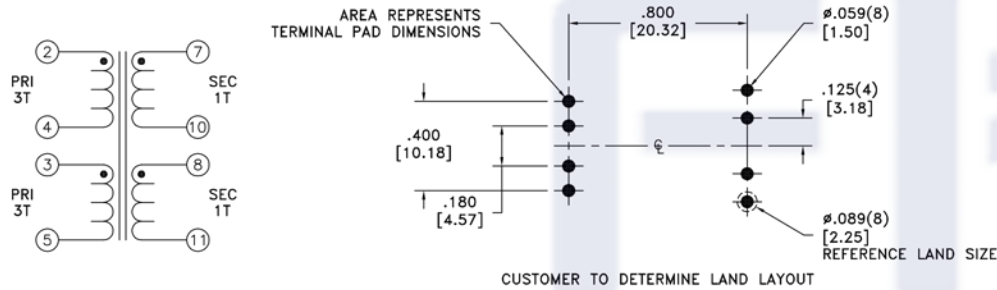

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
6C	6/14	Method: Tape & Reel PKG-0871		Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	TRANSFORMER	FKS750341181
6B	11/12			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750341181	SPECIFICATION SHEET 1 OF 1
6A	6/12					

