


CUSTOMER TERMINAL	RoHS	LEAD(Pb)–FREE
Au100%	Yes	Yes

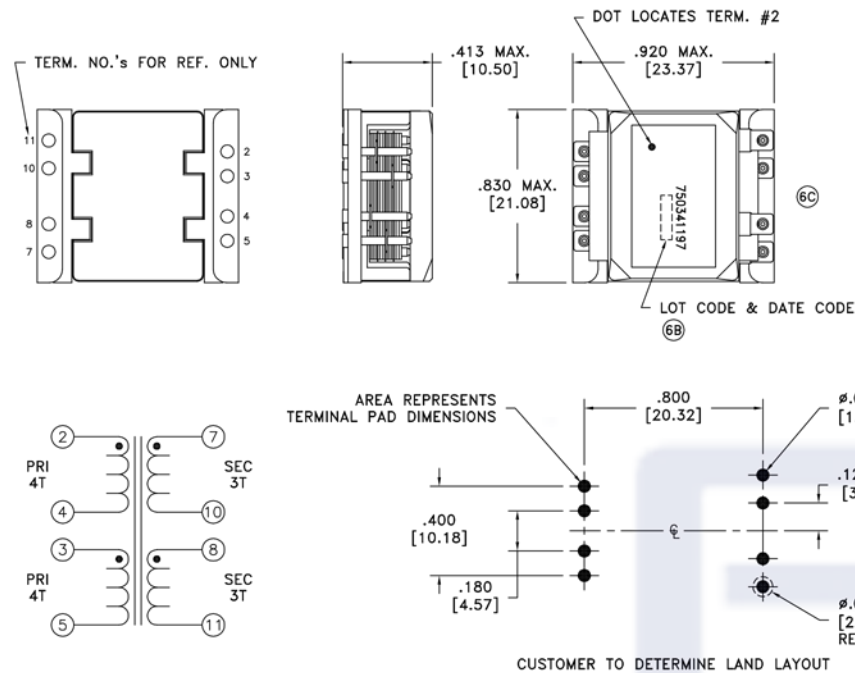

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	5.5 mOhms max.
D.C. RESISTANCE	3-5 @20°C	5.5 mOhms max.
D.C. RESISTANCE	7-10 @20°C	4.6 mOhms max.
D.C. RESISTANCE	8-11 @20°C	4.6 mOhms max.
INDUCTANCE	2-5 tie(3+4), 10kHz, 1.0VAC, Ls	153.0uH min.
LEAKAGE INDUCTANCE	2-5 tie(3+4, 7+8+10+11), 100kHz, 100mVAC, Ls	0.350uH max.
DIELECTRIC	2-7 tie(3+4, 8+10), 2250VDC, 1 second	-
URNS RATIO	(2-4):(3-5)	1:1, ±1%
URNS RATIO	(2-4):(7-10)	1.333:1, ±1%
URNS RATIO	(2-4):(8-11)	1.333:1, ±1%

GENERAL SPECIFICATIONS:
 OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

REV.	DATE	Packaging Specifications	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel	Angles: ±1°	TRANSFORMER	FKS750341197
6C	4/14	PKG-0871	Decimals: ±.005 [.13]		
6B	11/12		Fractions: ±1/64		
6A	7/12		Footprint: ±.005 [.13]		
			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750341197	SPECIFICATION SHEET 1 OF 1