
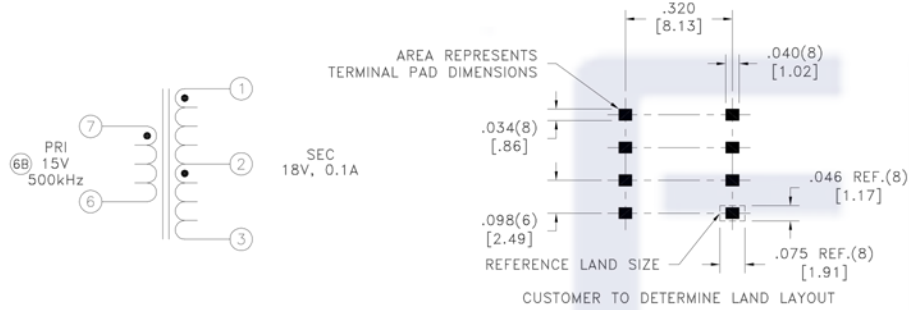


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

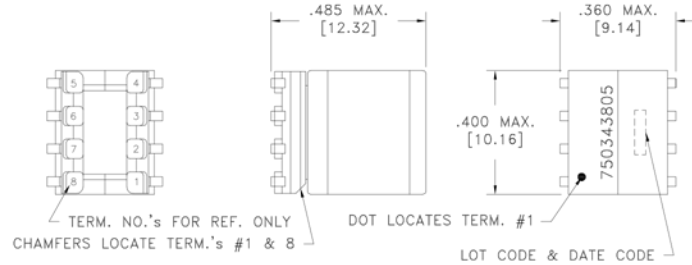

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	0.520 ohms max.
D.C. RESISTANCE	2-3 @20°C	0.520 ohms max.
D.C. RESISTANCE	7-6 @20°C	0.025 ohms max.
INDUCTANCE	7-6 10kHz, 100mVAC, Ls	20.00uH min.
LEAKAGE INDUCTANCE	7-6 tie(1+2+3), 100kHz, 100mVAC, Ls	180.0nH max.
DIELECTRIC	1-7 3000VAC, 1 second	-
URNS RATIO	(1-2):(7-6)	3.2:1, ±2%
URNS RATIO	(2-3):(7-6)	3.2:1, ±2%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
		Method: Tape & Reel PKG-0409		Angles: ±1° Fractions: ±1/64	TRANSFORMER	FKS750343805
6B	10/18			Decimals: ±.005 [.13] Footprint: ±.005 [.13]		
6A	8/18			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750343805	SPECIFICATION SHEET 1 OF 1

