


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

**FKS**  
Electronics

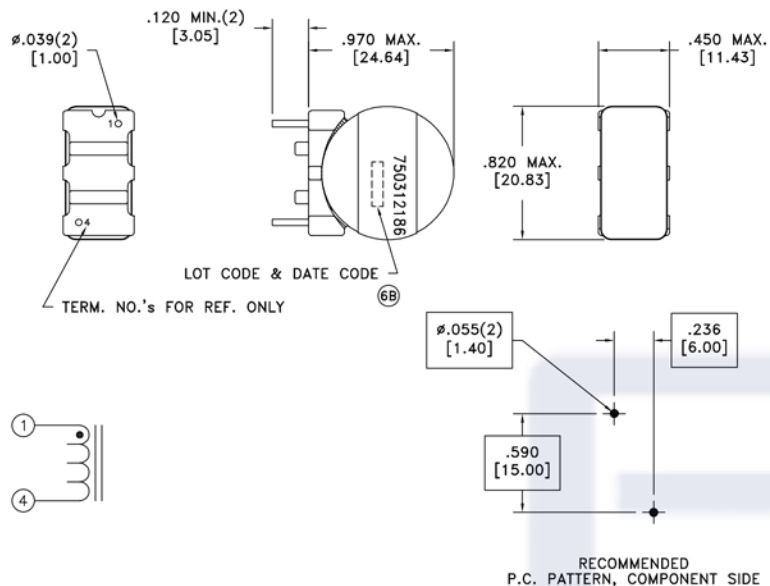

#### ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 @20°C	128 mOhms max.
INDUCTANCE	1-4 1kHz, 100mVAC, Ls	696.0uH $\pm 10\%$

#### GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

CURRENT RATING: 2A

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: $\pm 1^\circ$ Fractions: $\pm 1/64$	Decimals: $\pm .005$ [.13] Footprint: $\pm .001$ [.03]	DRAWING TITLE	PART NO.
		Method: Tray PKG-0119	6B			<b>INDUCTOR</b>	FKS750312186
6B	7/14			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		eiSos p/n: FKS750312186	
6A	5/11						



SPECIFICATION SHEET 1 OF 1