



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS		VALUE
D.C. RESISTANCE	3-2	@20°C	0.745 ohms max.
D.C. RESISTANCE	5-6	@20°C	0.070 ohms max.
D.C. RESISTANCE	7-8	@20°C	0.070 ohms max.
INDUCTANCE	3-2	10kHz, 100mVAC, Ls	2.50mH ±10%
LEAKAGE INDUCTANCE	3-2	tie(5+6+7+8), 100kHz, 100mVAC, Ls	230uH typ.
DIELECTRIC	2-8	tie(6+7), 2500VAC, 1 second	2000VAC, 1 minute
DIELECTRIC	6-7	2500VAC, 1 second	2000VAC, 1 minute
URNS RATIO	(3-2):(6-5)		30:1, ±1%
URNS RATIO	(3-2):(7-8)		30:1, ±1%

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

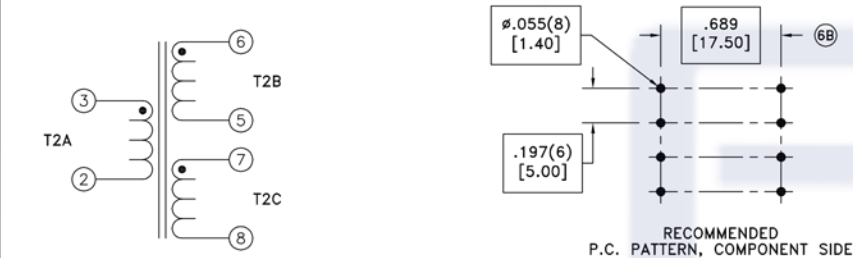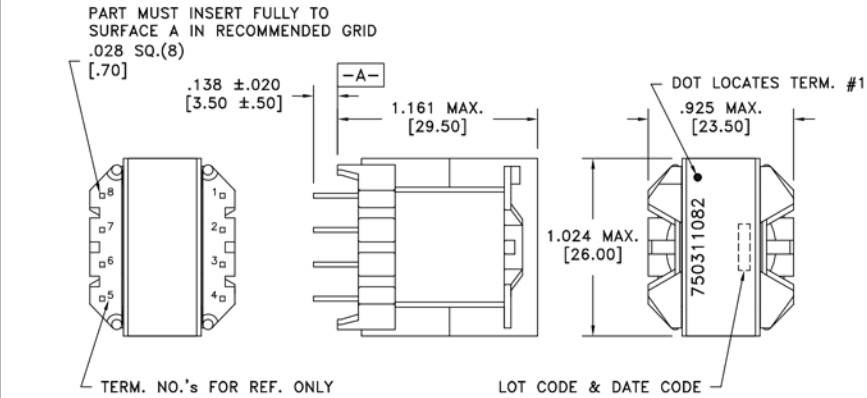

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.001 [.03]	DRAWING TITLE TRANSFORMER	PART NO. FKS750311082
6C	7/12	Method: Tray PKG-0824				
6B	7/11			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750311082	SPECIFICATION SHEET 1 OF 1
6A	4/10					

