


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes



PART MUST INSERT FULLY TO SURFACE A IN RECOMMENDED GRID
 $\phi.024(14)$
 [.60]

* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY
 DOT/CHAMFER LOCATES TERM. #1

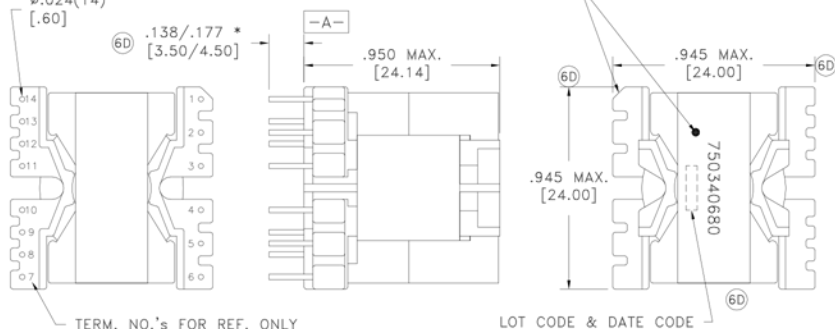

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:


PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	0.4 ohms max.
D.C. RESISTANCE	4-6 @20°C	0.17 ohms max.
INDUCTANCE	1-3 80kHz, 100mVAC, Ls	650 - 700uH
DIELECTRIC	1-4 1000VAC, 1 second	-
URNS RATIO	(1-3):(4-6)	9.375:1, $\pm 2\%$



Application Frequency: 80KHz
 50W PFC choke

GENERAL SPECIFICATIONS:

6C OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

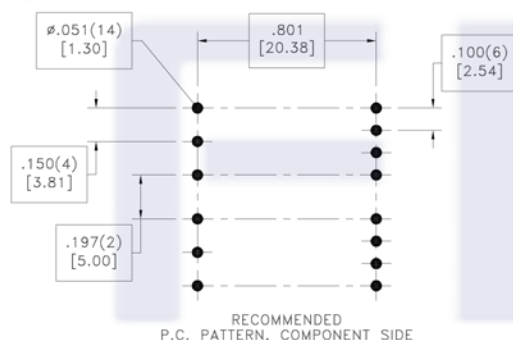

Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: $\pm 1^\circ$ Fractions: $\pm 1/64$	Decimals: $\pm .005$ [.13] Footprint: $\pm .001$ [.03]	DRAWING TITLE INDUCTOR	PART NO. FKS750340680
6D	7/15	Method: Tray PKG-0239					
6C	9/11						
6B	5/11						
6A	3/11						

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

eiSos p/n: FKS750340680



SPECIFICATION SHEET 1 OF 1