
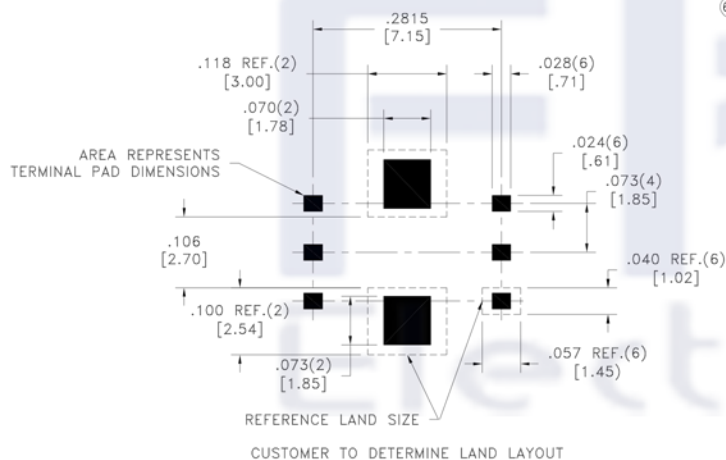

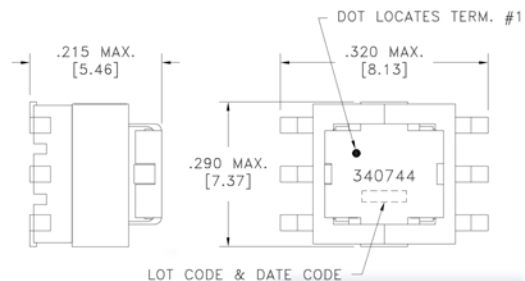


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	5.87 ohms max.
INDUCTANCE	1-3 100kHz, 100mVAC, Ls	2.0mH min.
DIELECTRIC	8-1 625VAC, 1 second	500VAC, 1 minute
URNS RATIO	(1-3):(8-7)	100:1, ±1%

GENERAL SPECIFICATIONS: CURRENT RATING: 10A max.

6B UL recognized class B insulation system M1-130(B), E106391.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0215	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. FKS750340744
6B	3/18			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750340744	SPECIFICATION SHEET 1 OF 1
6A	11/12					

