


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

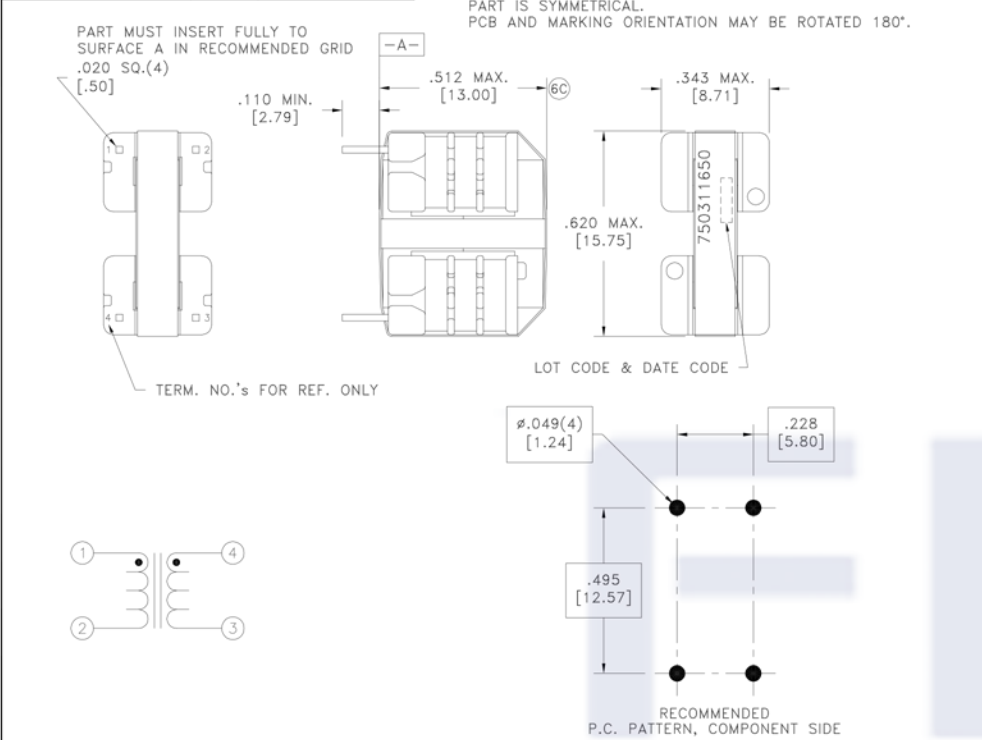

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-2 @20°C	10.05 ohms ±10%
D.C. RESISTANCE	3-4 @20°C	10.05 ohms ±10%
INDUCTANCE	1-2 10kHz, 100mVAC, Ls	45mH typ., 36mH min.
INDUCTANCE	3-4 10kHz, 100mVAC, Ls	45mH typ., 36mH min.
LEAKAGE INDUCTANCE	tie(2+3), 100kHz, 100mVAC, Ls	4.0mH min.
SATURATION CURRENT	20% rolloff from initial	200mA
SELF RESONANT FREQUENCY		300kHz min.
DIELECTRIC	1-4 1875VAC, 1 second	1500VAC, 1 minute

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

RATED CURRENT: 180mA causes 40°C temp rise from ambient.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	 CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: $\pm 1^\circ$ Decimals: $\pm .005$ [.13] Fractions: $\pm 1/64$ Footprint: $\pm .001$ [.03]	DRAWING TITLE	PART NO.
6F	7/16	Method: Tray		TRANSFORMER		
6E	7/14	PKG-0888				
6D	9/12					
6C	12/10					
				This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: FKS750311650	FKS750311650
						SPECIFICATION SHEET 1 OF 1

