


FKS
Electronics



PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE 1-3	②20°C	6.25 ohms ±10%
D.C. RESISTANCE 4-6	②20°C	6.25 ohms ±10%
INDUCTANCE 1-3	10kHz, 100mVAC, Ls	50mH min.
INDUCTANCE 4-6	10kHz, 100mVAC, Ls	50mH min.
LEAKAGE INDUCTANCE 1-3	tie(4+8), 100kHz, 100mVAC, Ls	175uH min.
DIELECTRIC 1-6	1875VAC, 1 second	1500VAC, 1 minute
URNS RATIO	(1-3):(6-4)	1:1, ±1%

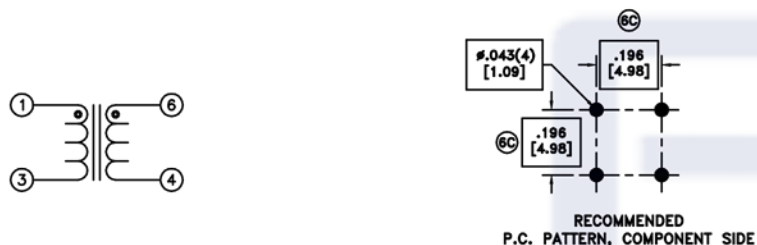

GENERAL SPECIFICATIONS:

RATED CURRENT: 170mA rms current that will cause an approximate 40°C temperature rise from ambient.

REV.	DATE	Packaging Specifications	 CONVENTION PLACEMENT	Tolerances unless otherwise specified:	DRAWING TITLE TRANSFORMER	PART NO. FKS750310784	
6D	11/11	Method: Tray		Angles: $\pm 1^\circ$			Decimals: $\pm .005$ [.13]
6C	6/09	PKG-0847		Fractions: $\pm 1/64$			Footprint: $\pm .001$ [.03]
6B	3/09			This drawing is dual dimensioned. Dimensions			
6A	6/08			in brackets are in millimeters.			
					eiSos p/n: FKS750310784	 SPECIFICATION SHEET 1 OF 1	