


EFD20

12-Terminal, SMT, Horizontal

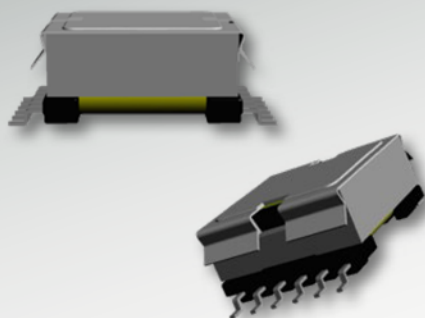

Characteristics

- Surface mount
- Pick & placeable
- Core direction: horizontal
- Functional insulation


Applications

- Lighting
- Metering
- PoE
- DC/DC converter
- Industrial controls
- White goods
- Telecom

Core Data


Core Part Number	Area (A_c) (mm ²)	Path Length (L_p) (mm)	Volume (V_c) (mm ³)
150-2124	31.00	47.00	1457.00

Dimensions & Footprint

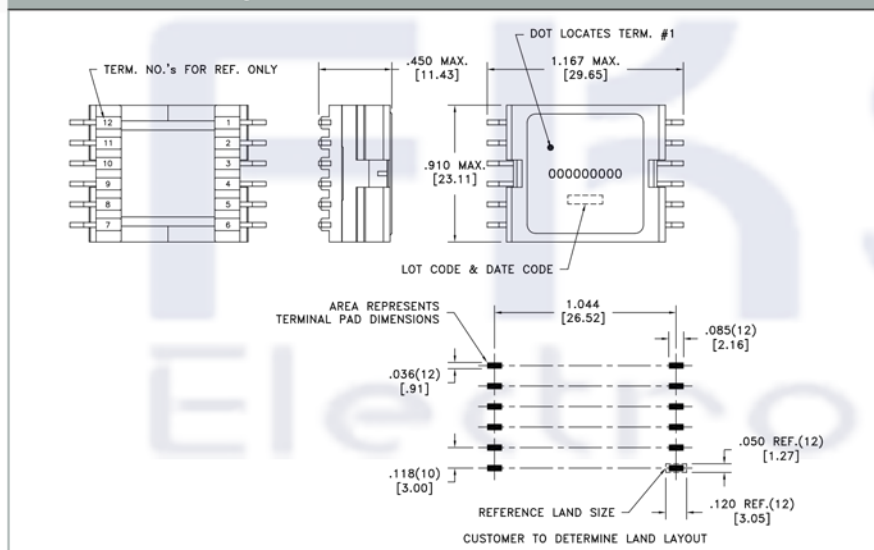

Bobbin Winding Area

Bobbin Part Number	Width (mm)	Build (mm)	Perimeter (mm)
070-5899	13.64	2.11	31.20

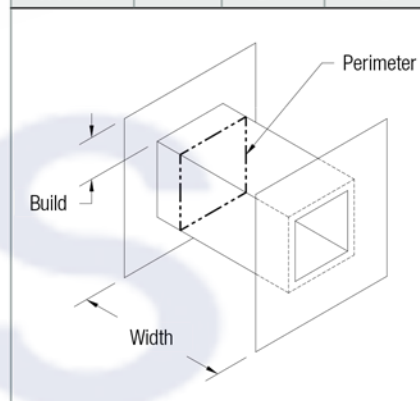

Models

- A** Altium Library
- E** Eagle Library
- S** STEP 3D Model
- I** IGS 3D Model
- W** WRL 3D Model

Estimated Maximum Power Level

