


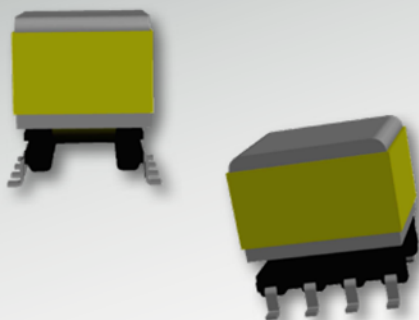

Characteristics

- Surface mount
- Pick & placeable
- Core direction: horizontal
- Basic/supplementary insulation


Applications

- DC/DC converter
- Industrial controls
- White goods
- DSL
- Telecom
- CMC


Core Data

Core Part Number		Area (A_c) (mm ²)	Path Length (L_p) (mm)	Volume (V_c) (mm ³)
Power: 150-2365	Digital: 150-0341	10.30	15.70	161.71

Dimensions & Footprint

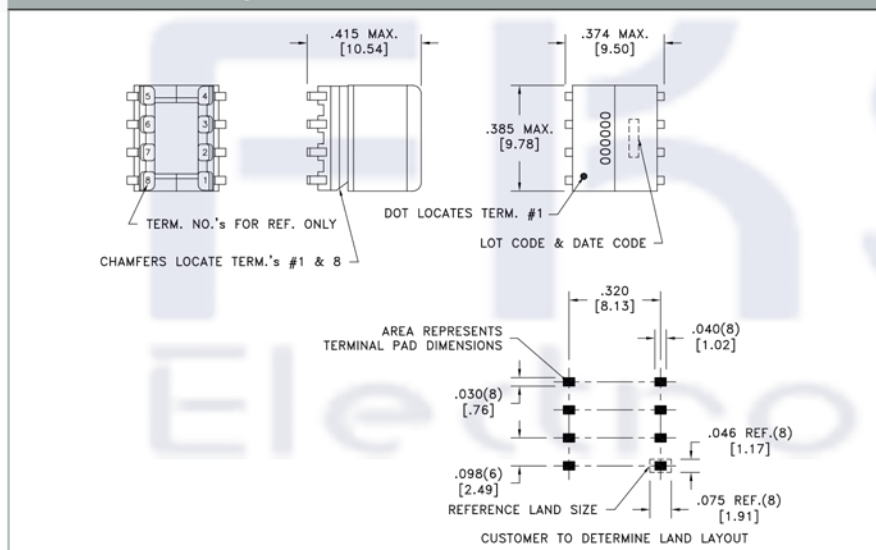


Estimated Maximum Power Level

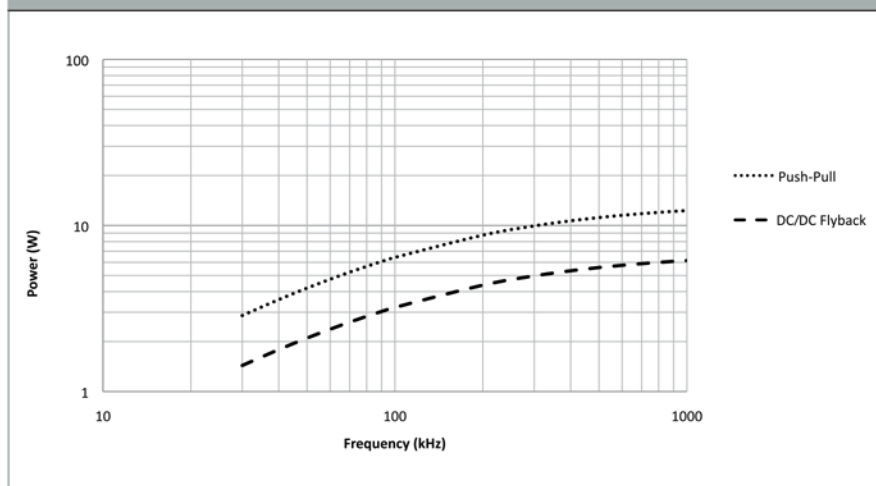

Bobbin Winding Area

Bobbin Part Number	Width (mm)	Build (mm)	Perimeter (mm)
070-4436	3.86	1.24	14.20

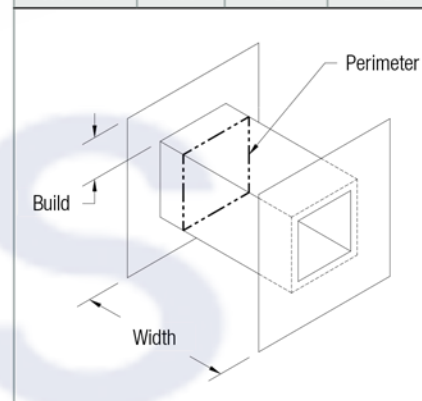

Models

- A** Altium Library
- E** Eagle Library
- S** STEP 3D Model
- I** IGS 3D Model
- W** WRL 3D Model